



US007778610B2

(12) **United States Patent**  
Staszewski et al.

(10) **Patent No.:** US 7,778,610 B2  
(45) **Date of Patent:** Aug. 17, 2010

(54) **LOCAL OSCILLATOR WITH  
NON-HARMONIC RATIO BETWEEN  
OSCILLATOR AND RF FREQUENCIES  
USING XOR OPERATION WITH JITTER  
ESTIMATION AND CORRECTION**

(75) Inventors: **Robert B. Staszewski**, Garland, TX  
(US); **Nir Tal**, Haifa (IL)

(73) Assignee: **Texas Instruments Incorporated**,  
Dallas, TX (US)

(\* ) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 539 days.

(21) Appl. No.: **11/844,425**

(22) Filed: **Aug. 24, 2007**

(65) **Prior Publication Data**

US 2008/0055008 A1 Mar. 6, 2008

**Related U.S. Application Data**

(60) Provisional application No. 60/823,837, filed on Aug.  
29, 2006.

(51) **Int. Cl.**  
*H04B 1/40* (2006.01)

(52) **U.S. Cl.** ..... **455/76**; 331/57; 331/37;  
331/18; 331/25; 331/34; 327/156; 327/158;  
327/159; 708/270; 708/271; 708/272; 708/273;  
708/274; 708/275; 708/276; 708/277

(58) **Field of Classification Search** ..... 455/76;  
331/57, 37, 18, 25, 34; 327/156, 159; 708/270-277  
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,107,891 A \* 8/2000 Coy ..... 331/18  
6,404,293 B1 \* 6/2002 Darabi et al. .... 331/37  
6,809,598 B1 \* 10/2004 Staszewski et al. .... 331/16  
6,850,749 B2 \* 2/2005 Soorapanth et al. .... 455/318  
7,132,895 B2 \* 11/2006 Roth ..... 331/1 A  
7,409,416 B2 \* 8/2008 Stengel ..... 708/270  
2006/0033582 A1 \* 2/2006 Staszewski et al. .... 331/16  
2006/0038710 A1 \* 2/2006 Staszewski et al. .... 341/143

\* cited by examiner

*Primary Examiner*—Matthew D Anderson


*Assistant Examiner*—April G Gonzales

(74) *Attorney, Agent, or Firm*—Ronald O. Neerings; Wade  
James Brady, III; Frederick J. Telecky, Jr.

(57) **ABSTRACT**

A novel and useful apparatus for and method of local oscillator (LO) generation with non-integer multiplication ratio between the local oscillator and RF frequencies. The LO generation schemes presented are operative to generate I and Q square waves at a designated frequency while avoiding the well known issue of harmonic pulling. The use of analog mixers of the prior art is avoided and replaced with an XOR gate configured to generate the correct average frequency. The edges are dynamically adjusted by  $\pm T/12$  or zero based on the state of the controlled oscillator down-divided clock.

**31 Claims, 22 Drawing Sheets**

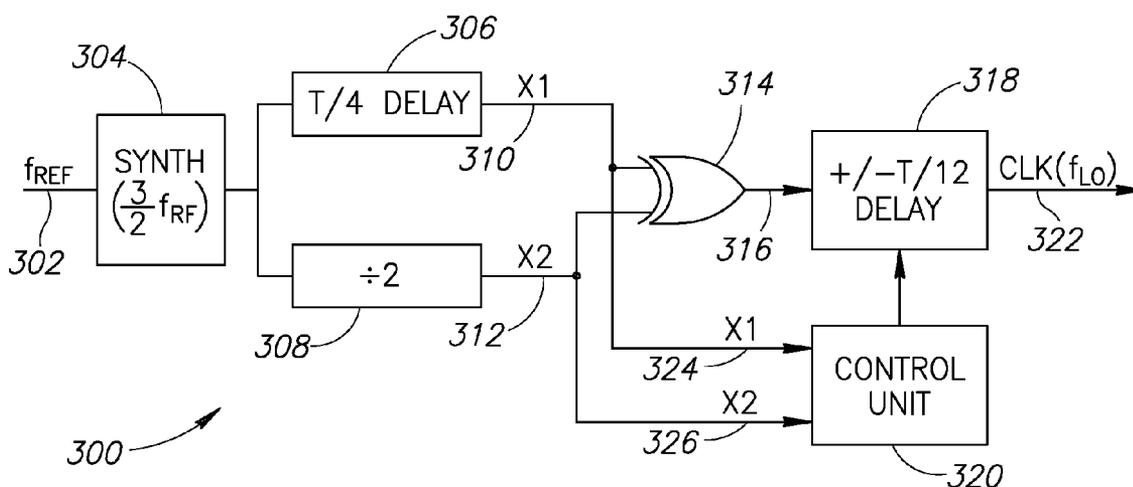

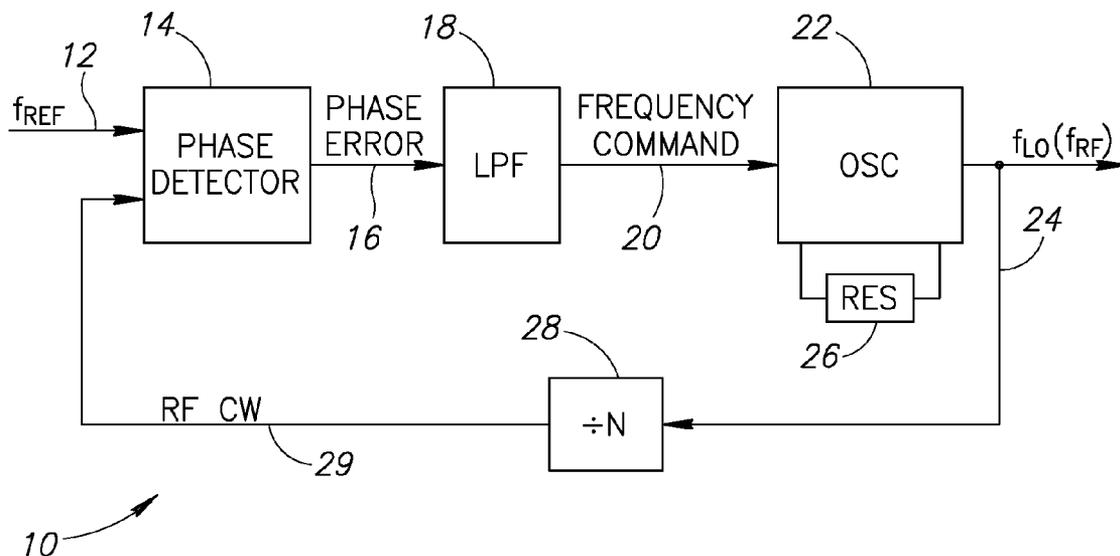


FIG.1  
(PRIOR ART)

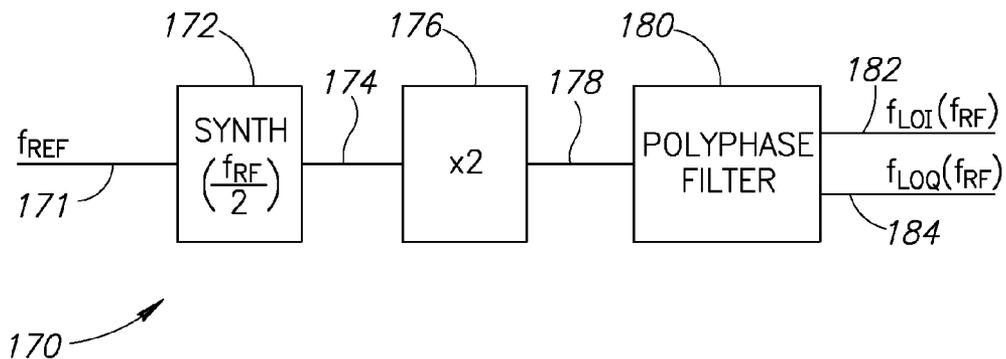


FIG.2  
(PRIOR ART)

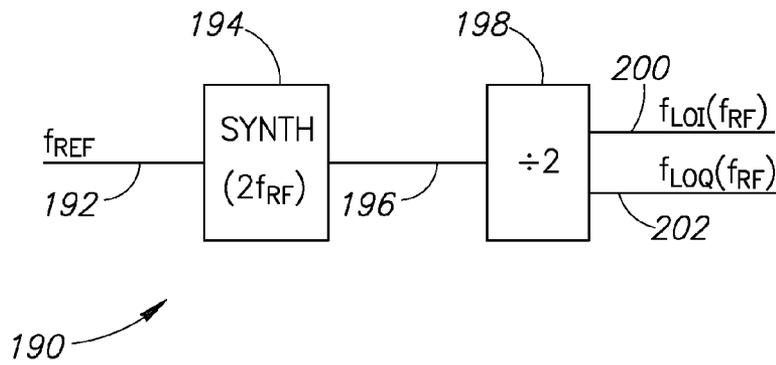


FIG. 3  
(PRIOR ART)

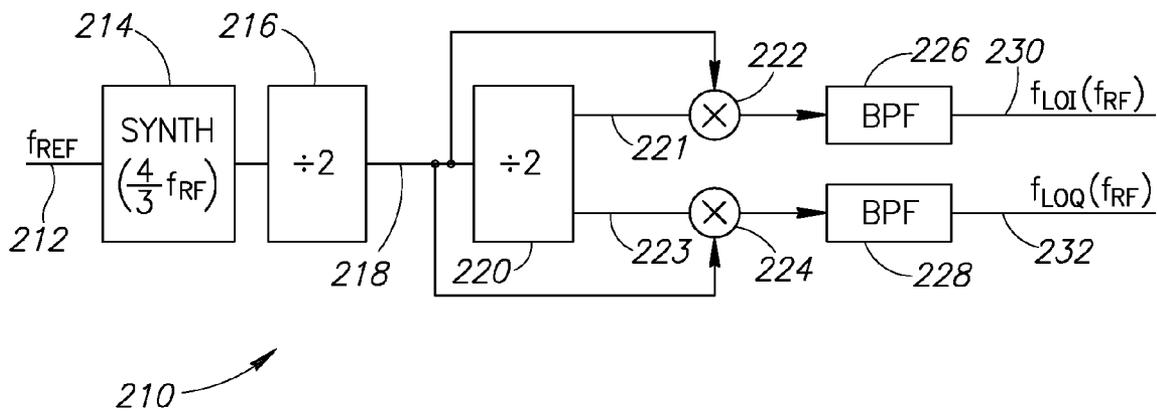


FIG. 4  
(PRIOR ART)

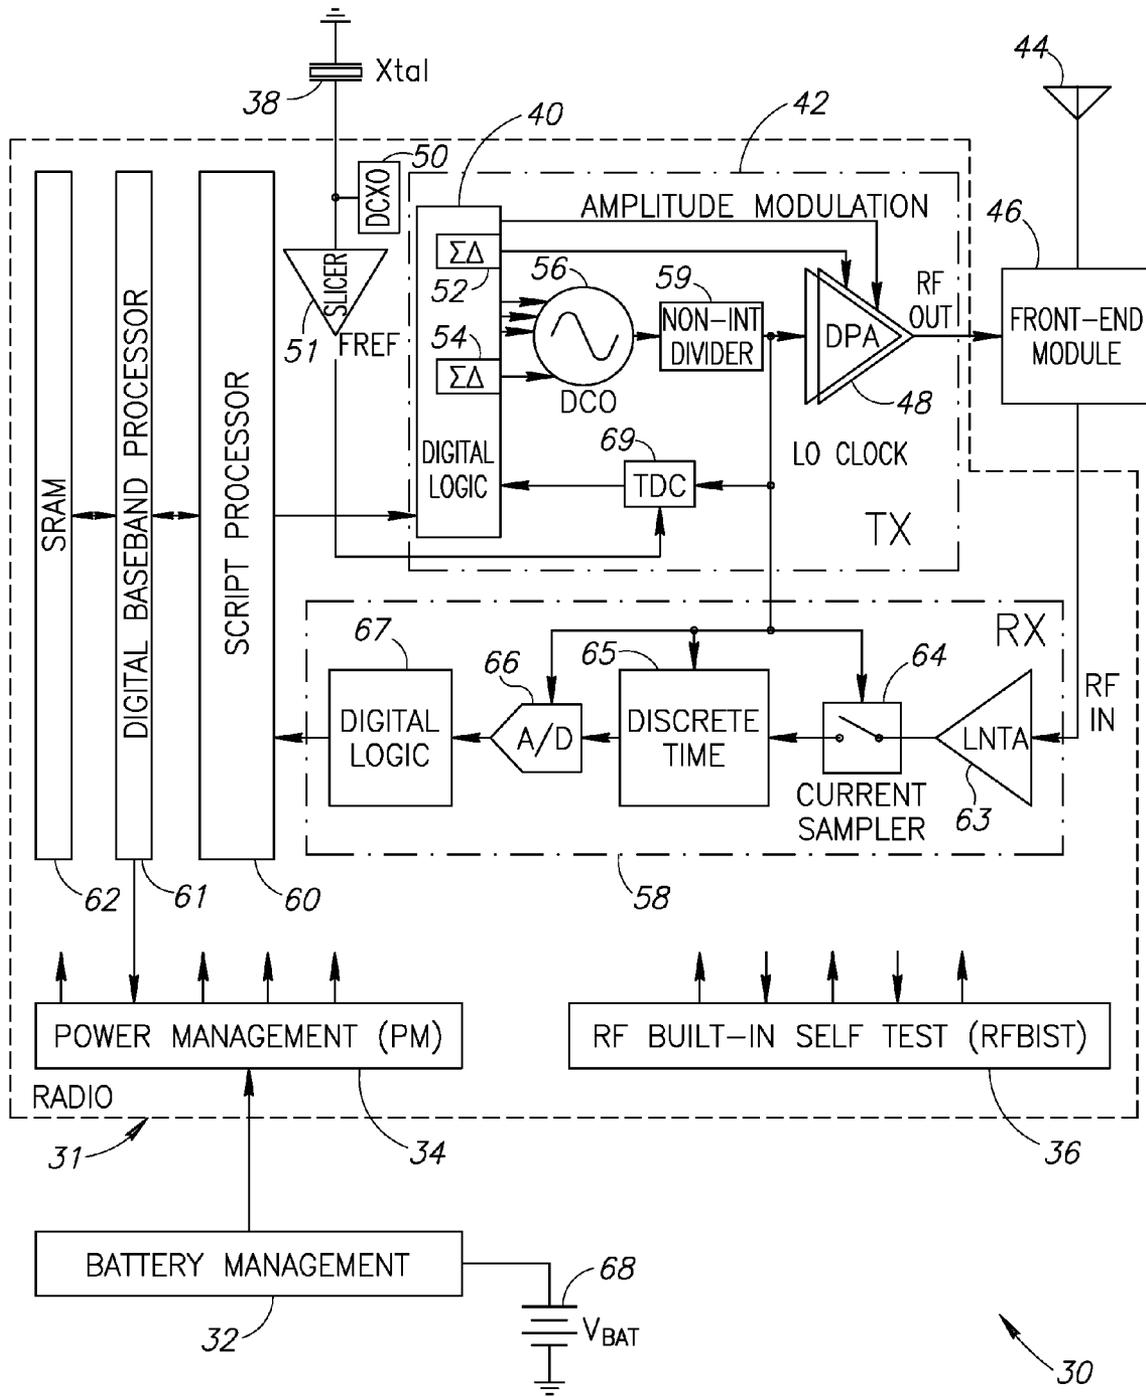


FIG.5

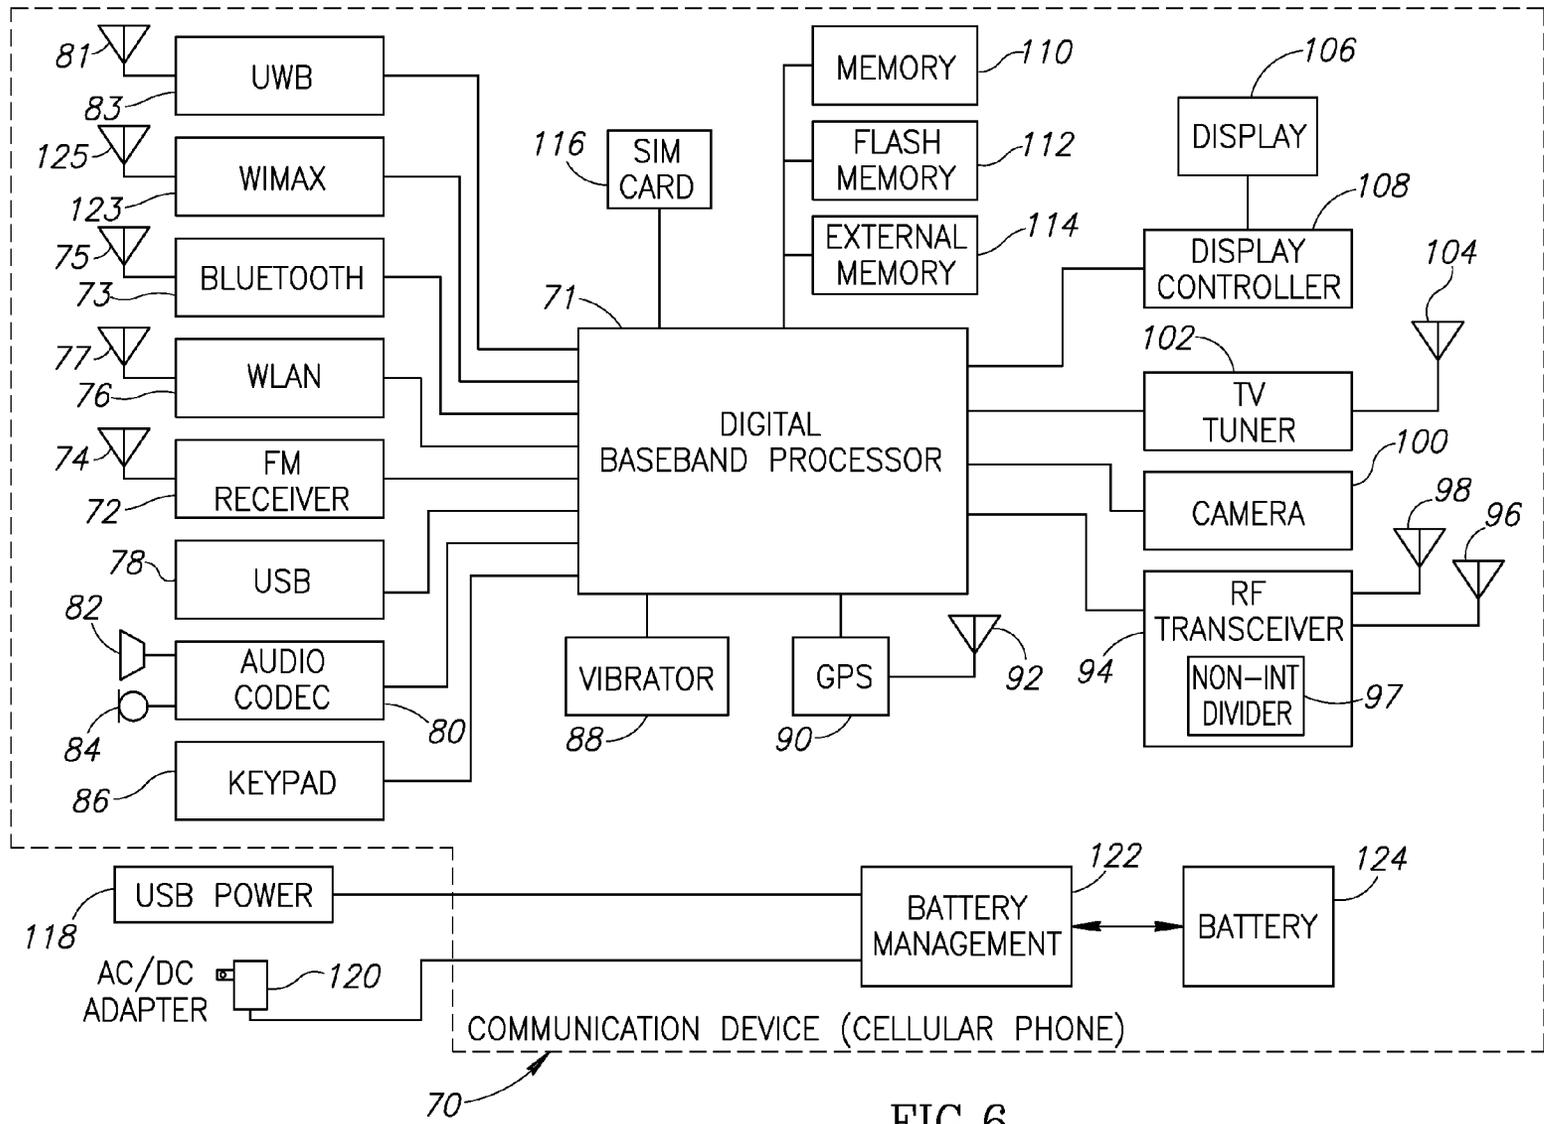


FIG. 6

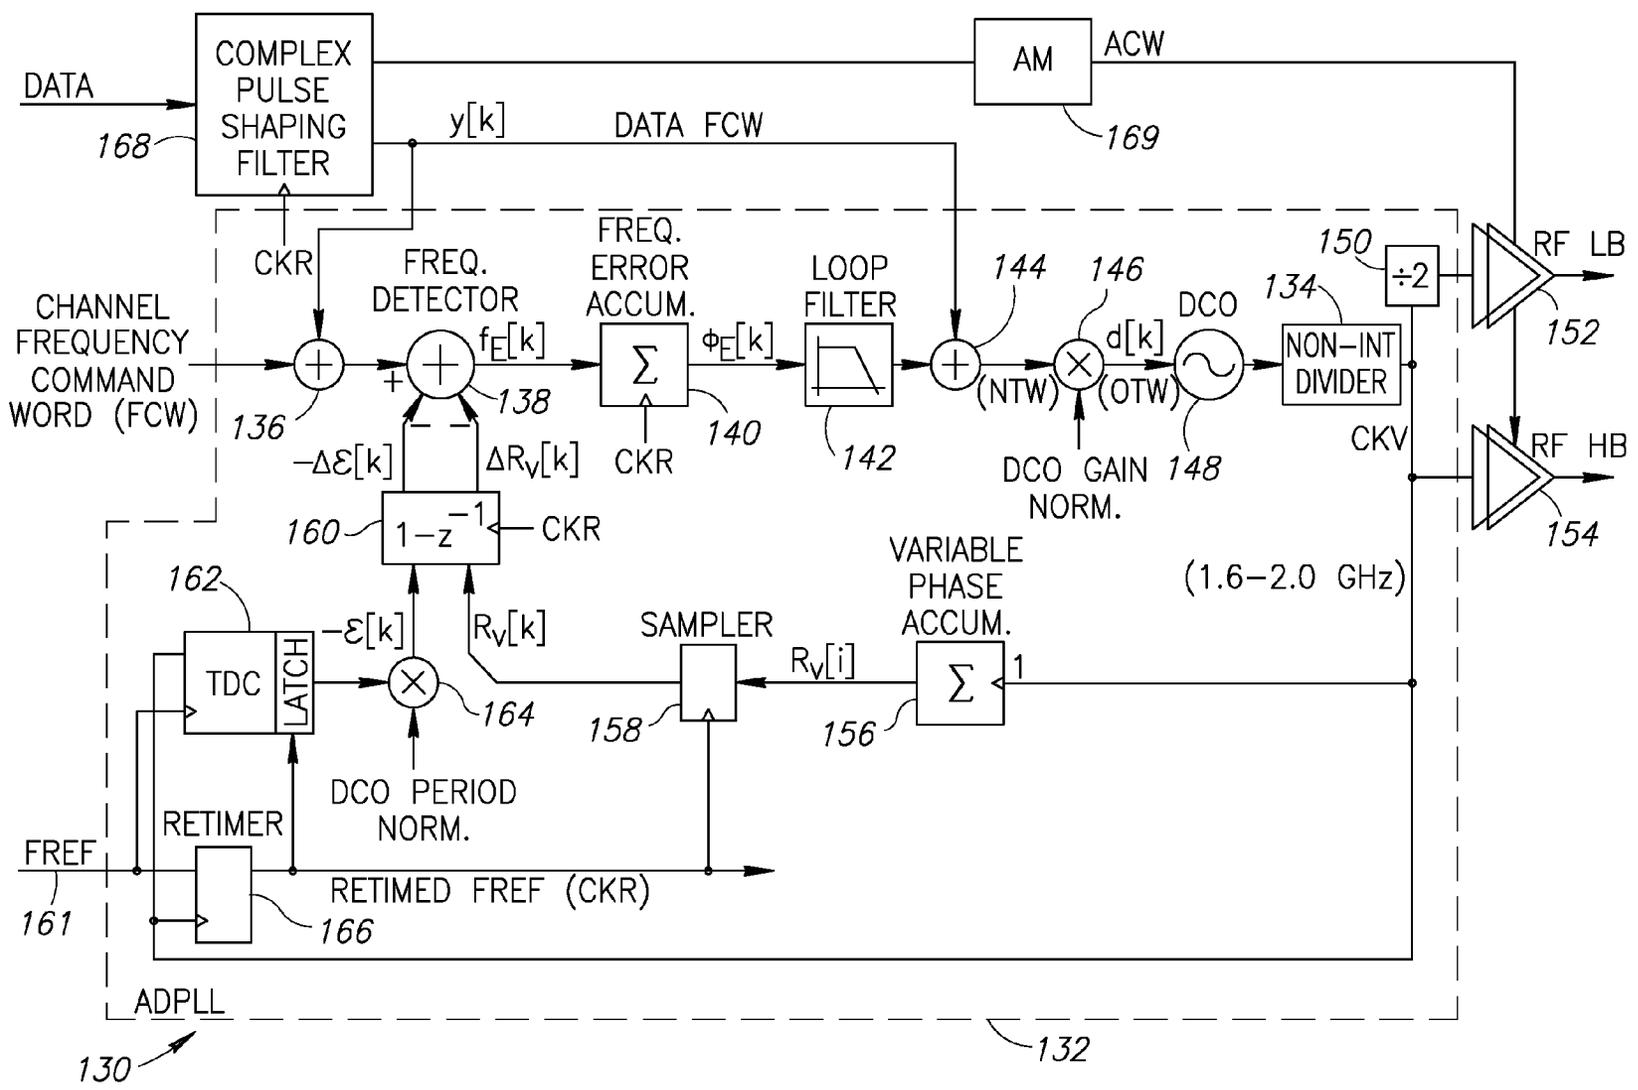


FIG. 7

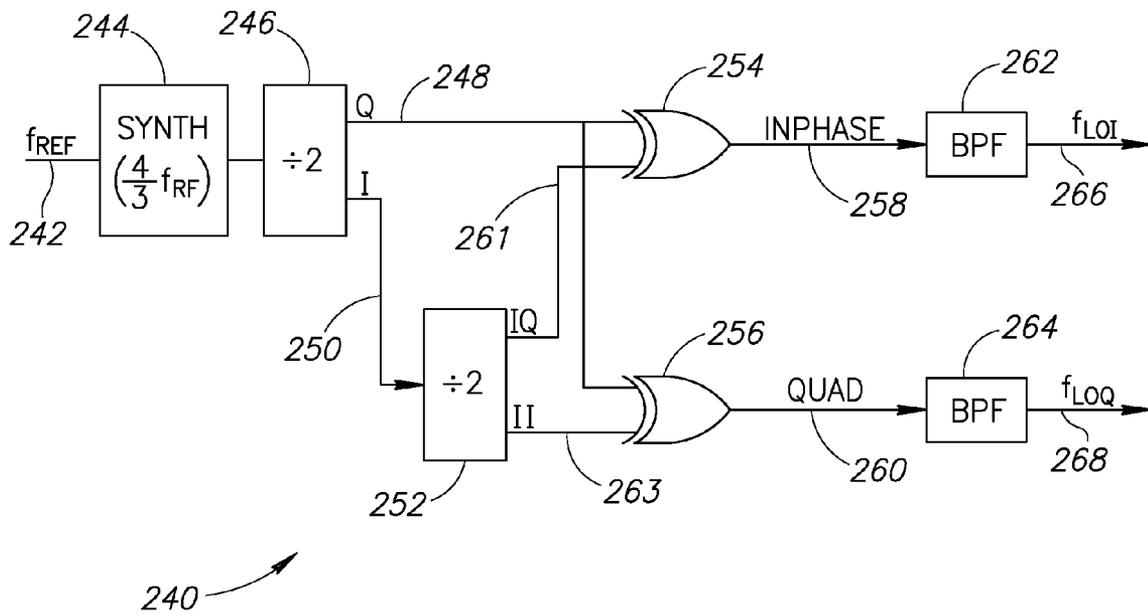


FIG. 8

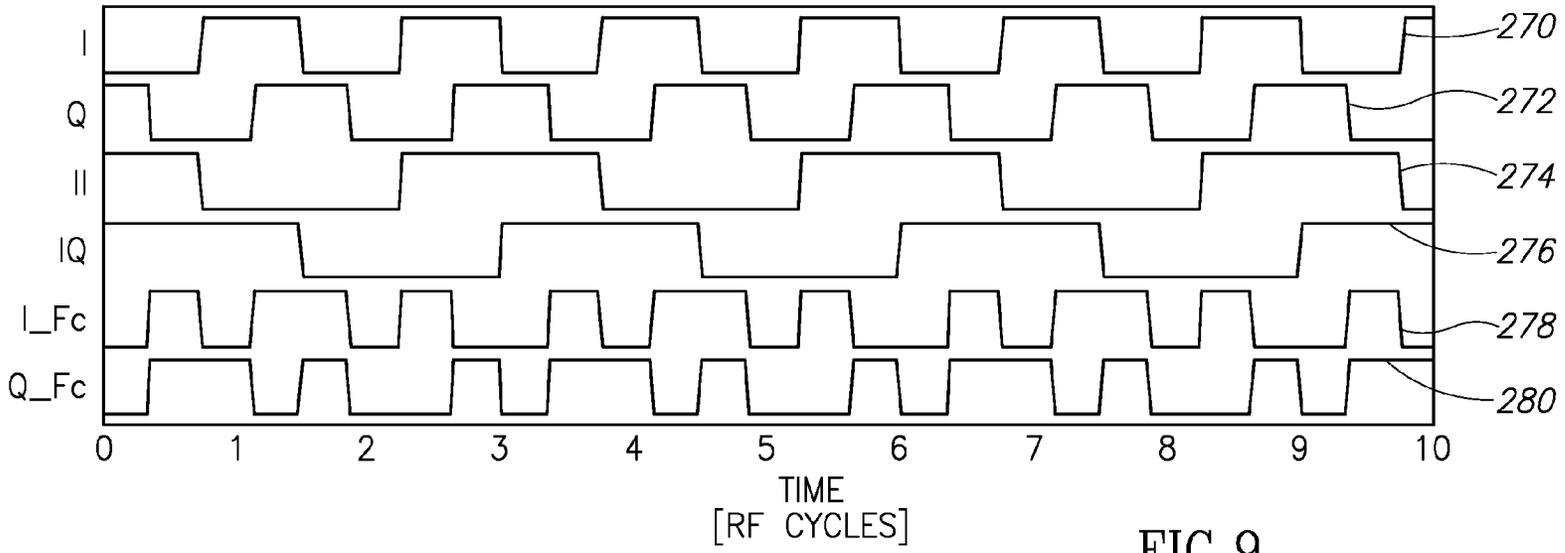


FIG. 9

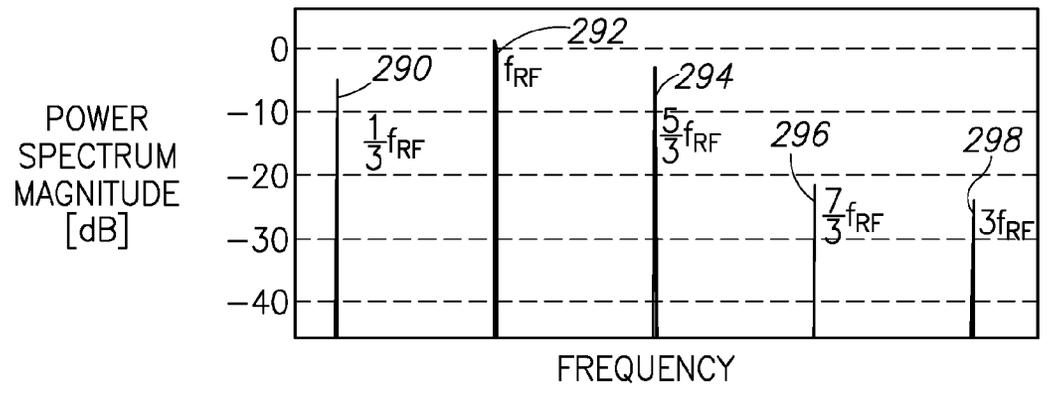


FIG. 10

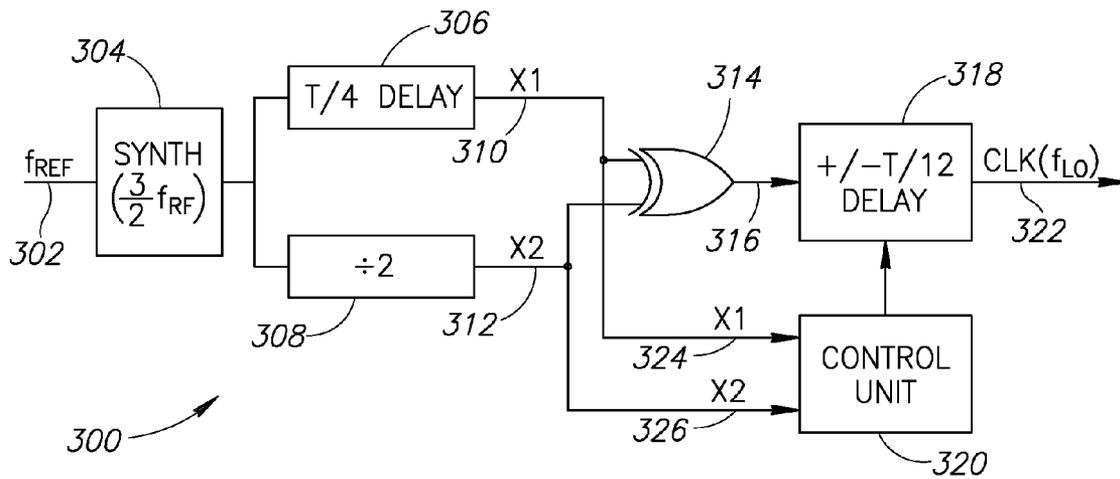


FIG.11

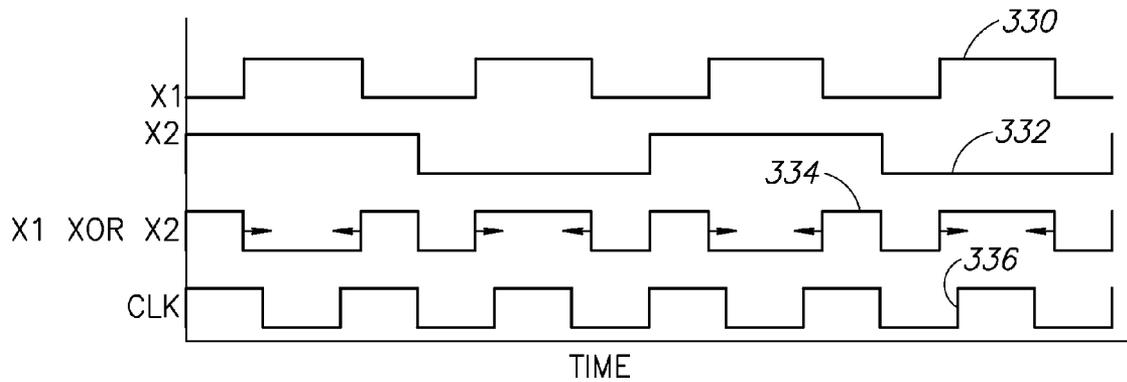


FIG.12

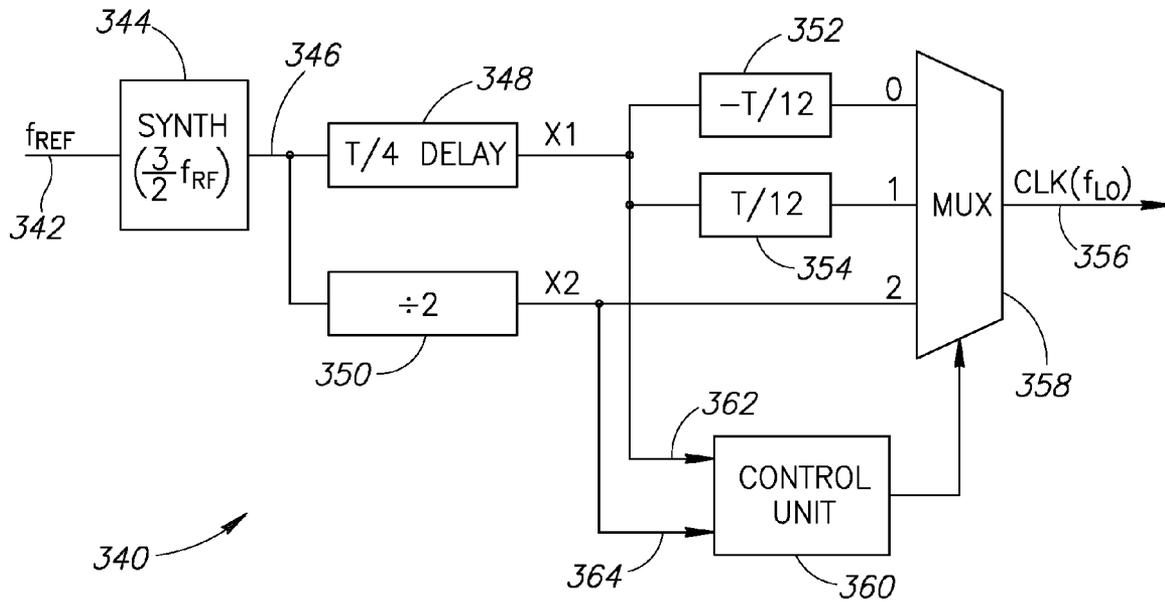


FIG.13

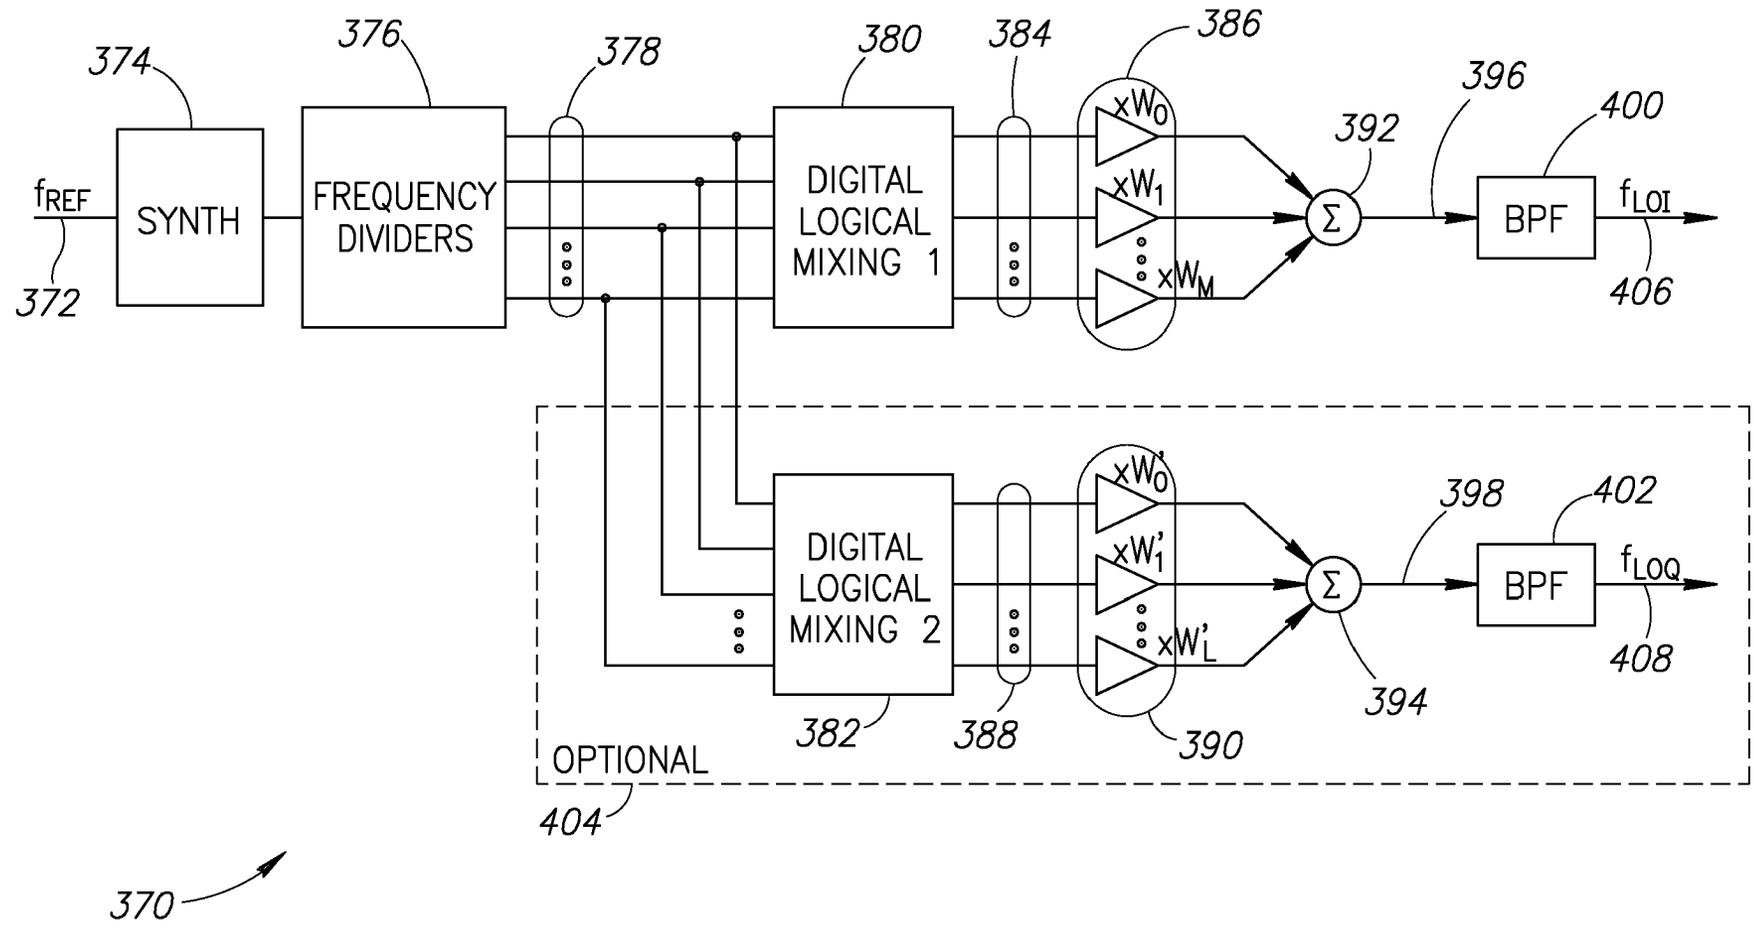


FIG.14

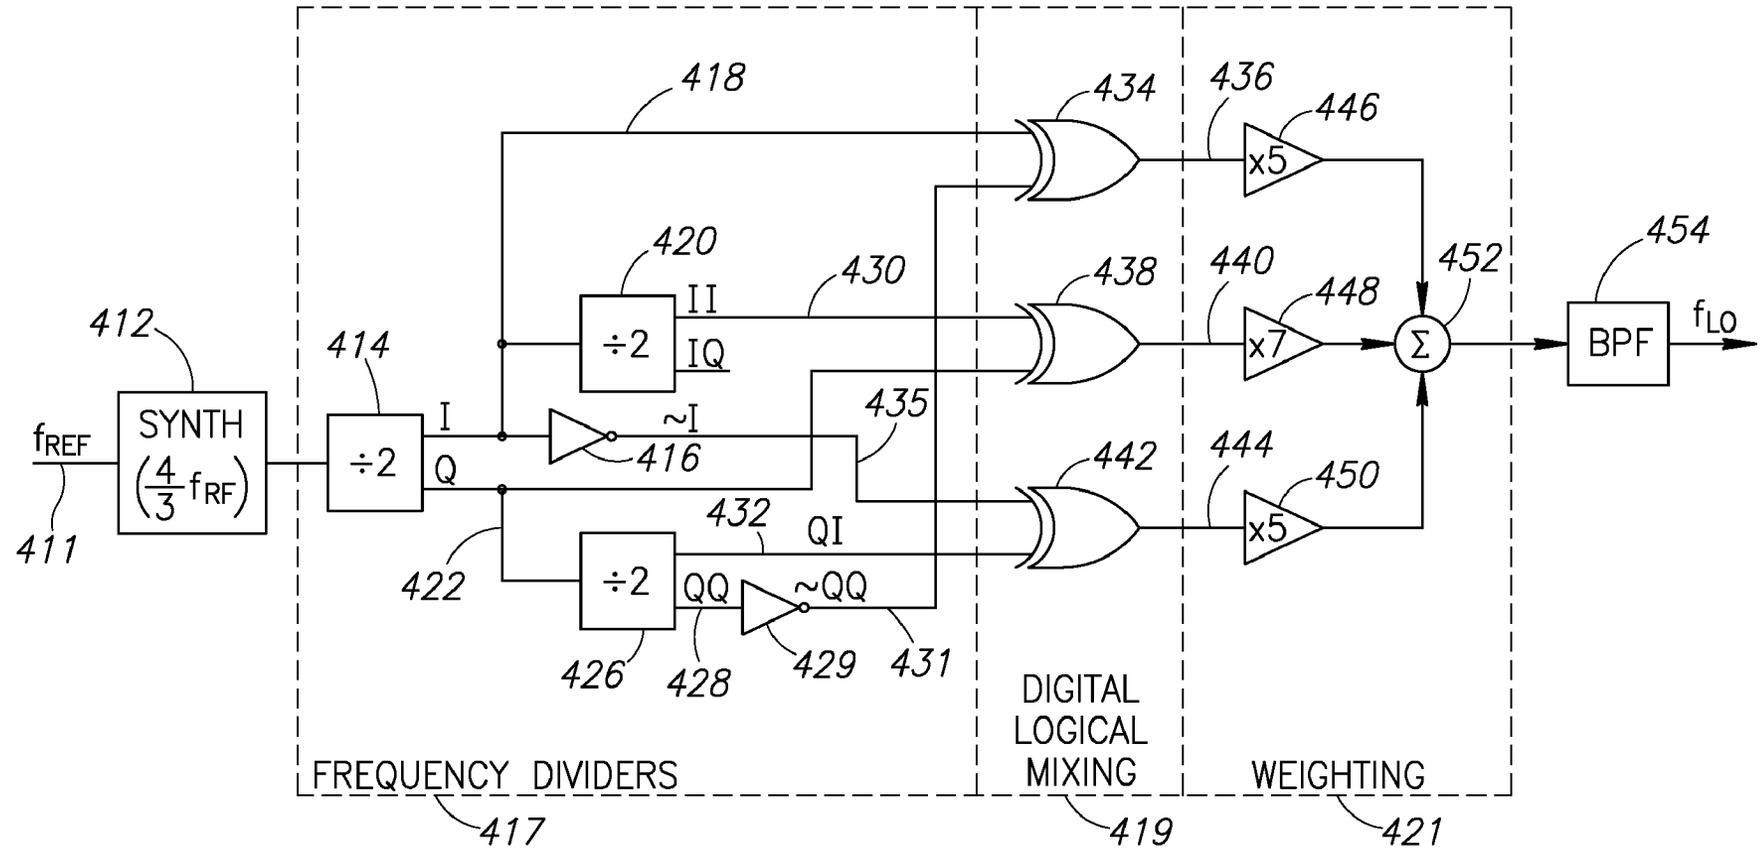


FIG.15

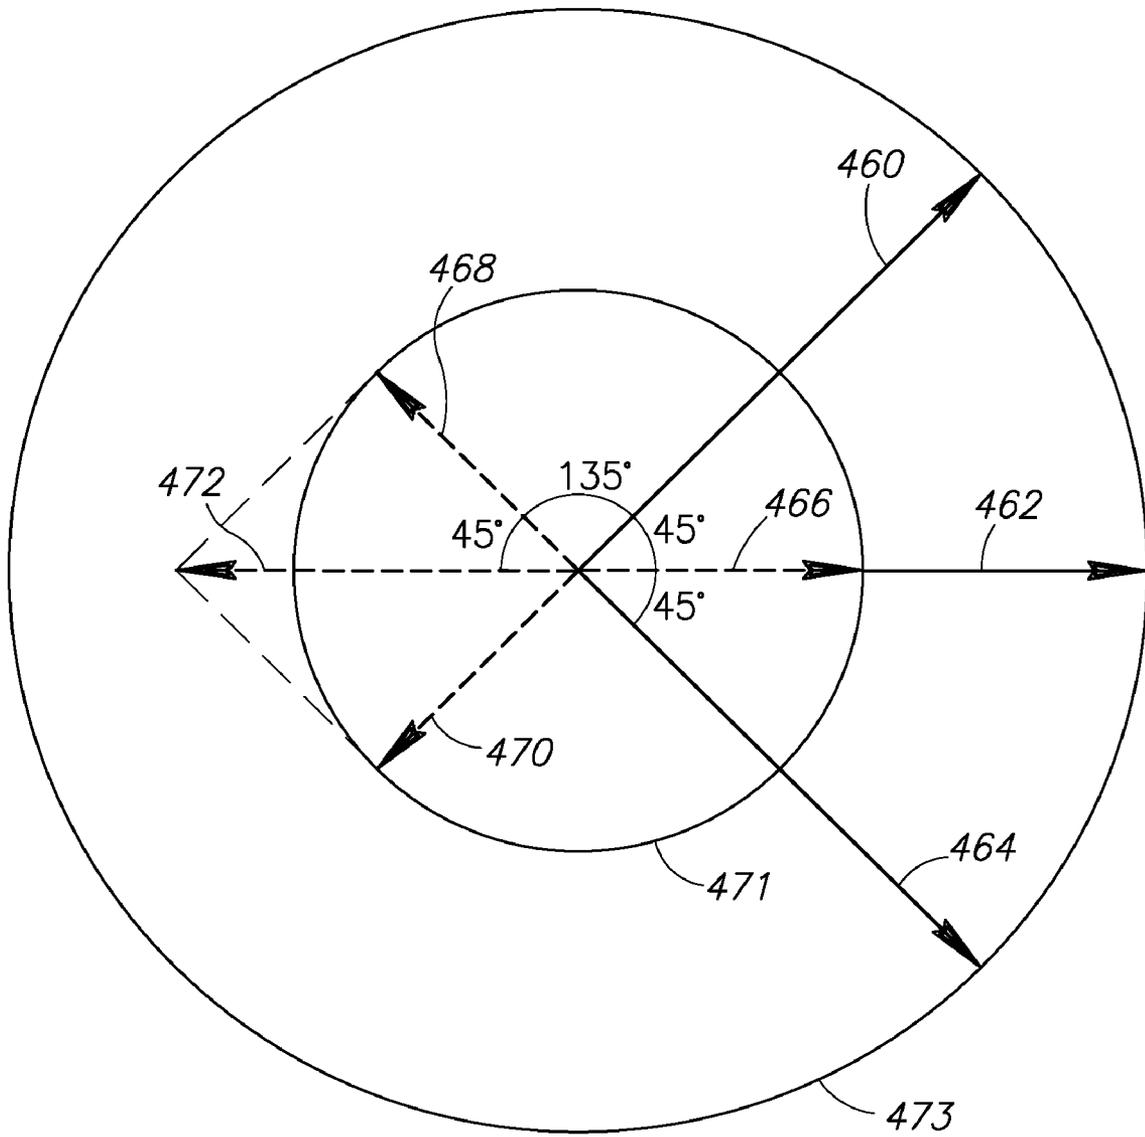


FIG.16

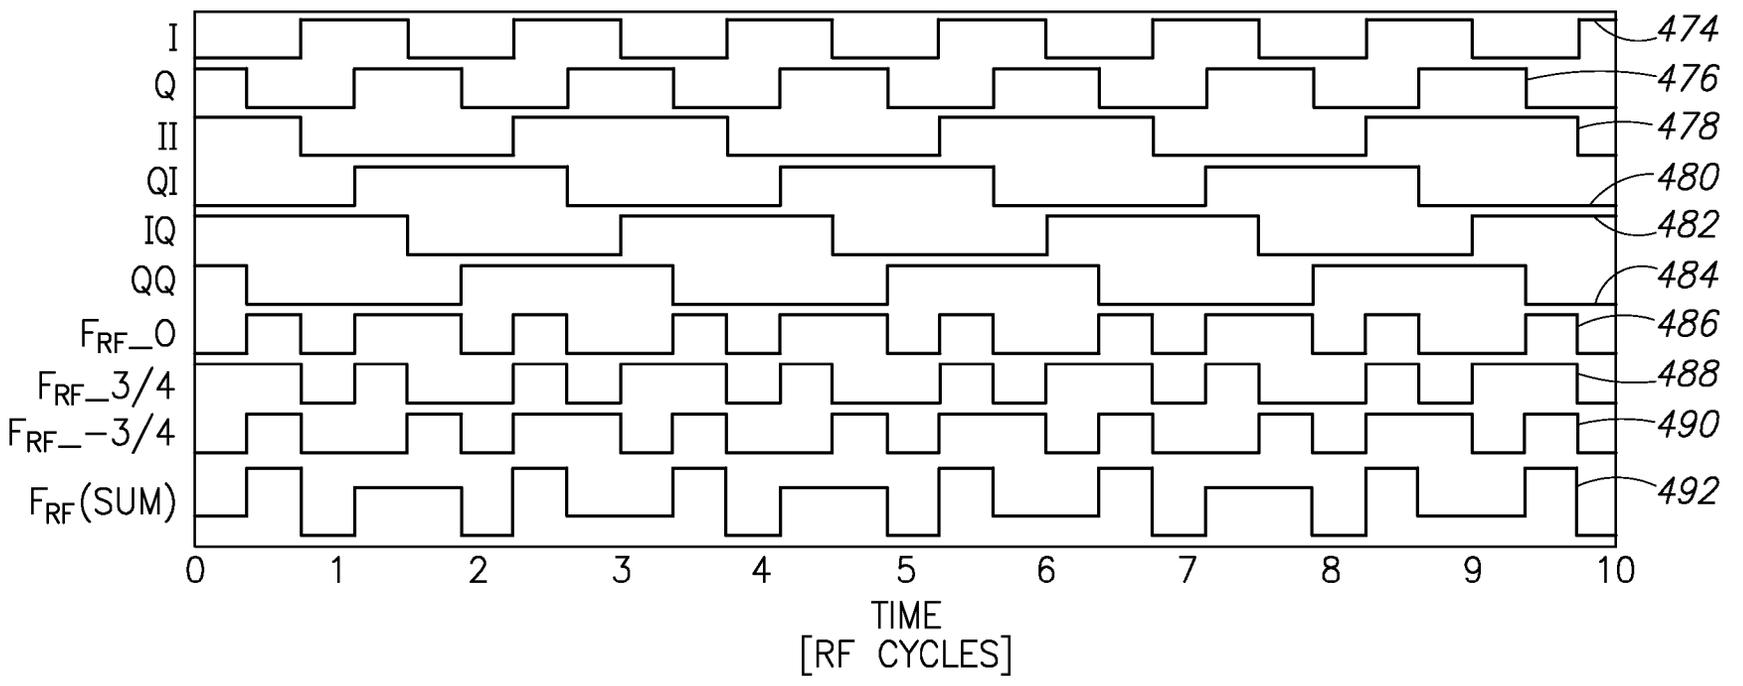


FIG.17

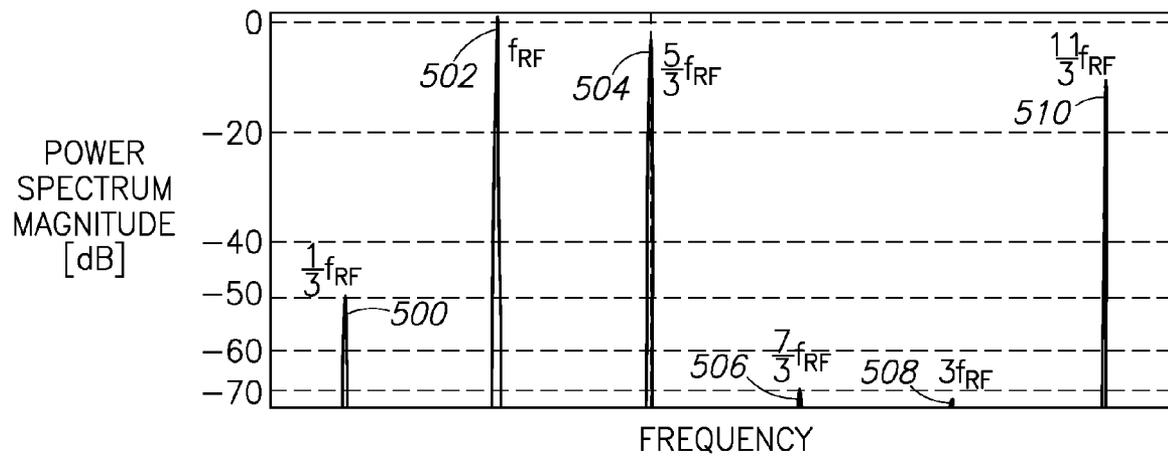


FIG.18

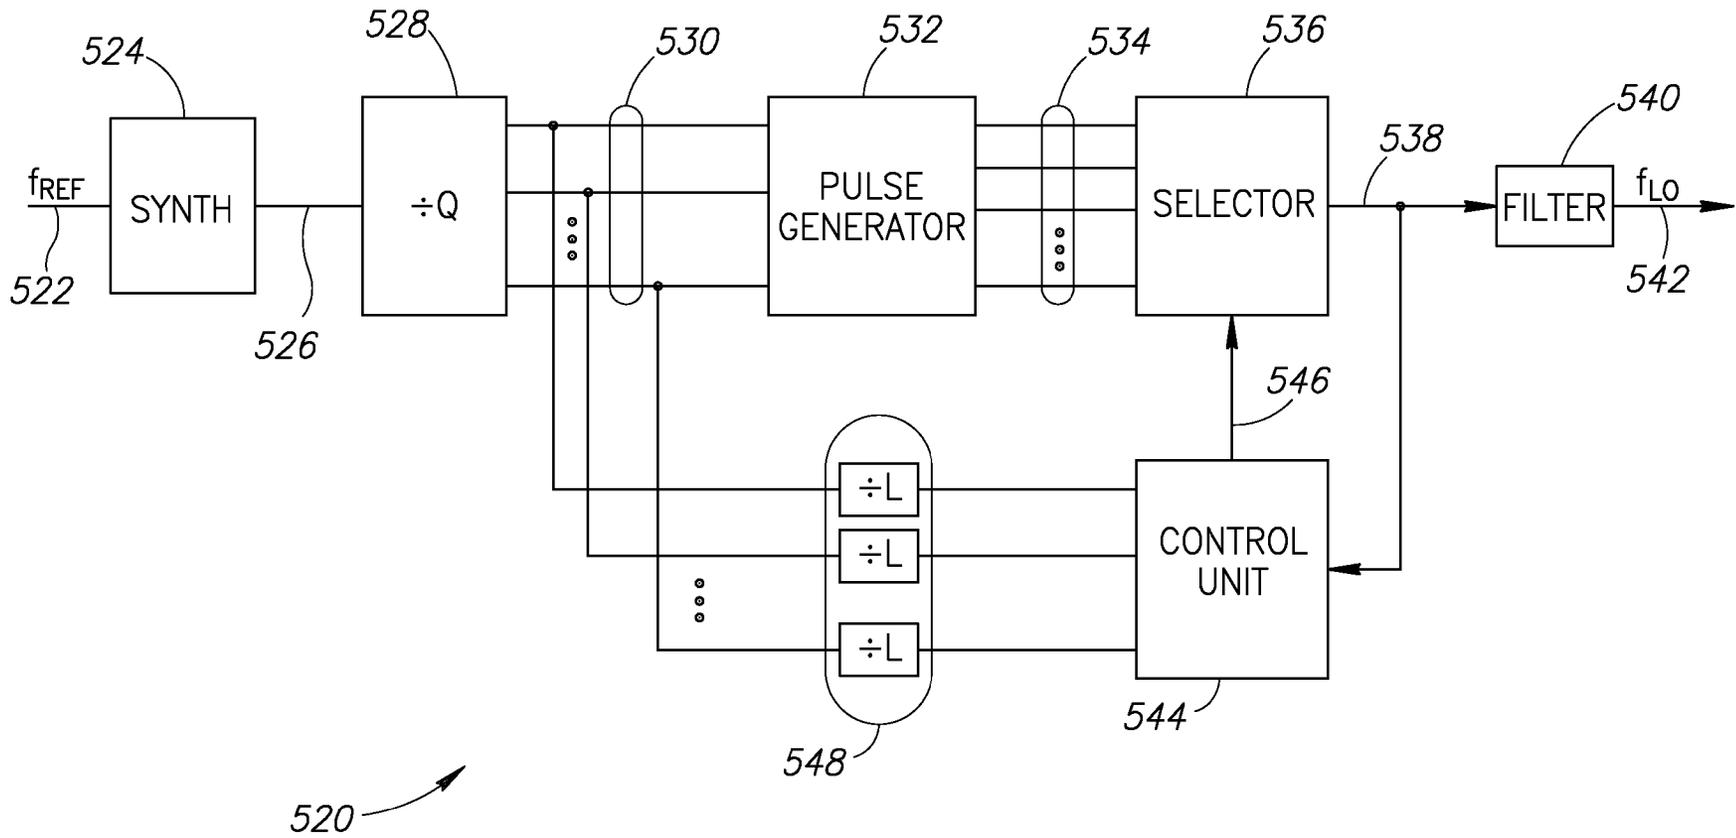


FIG.19

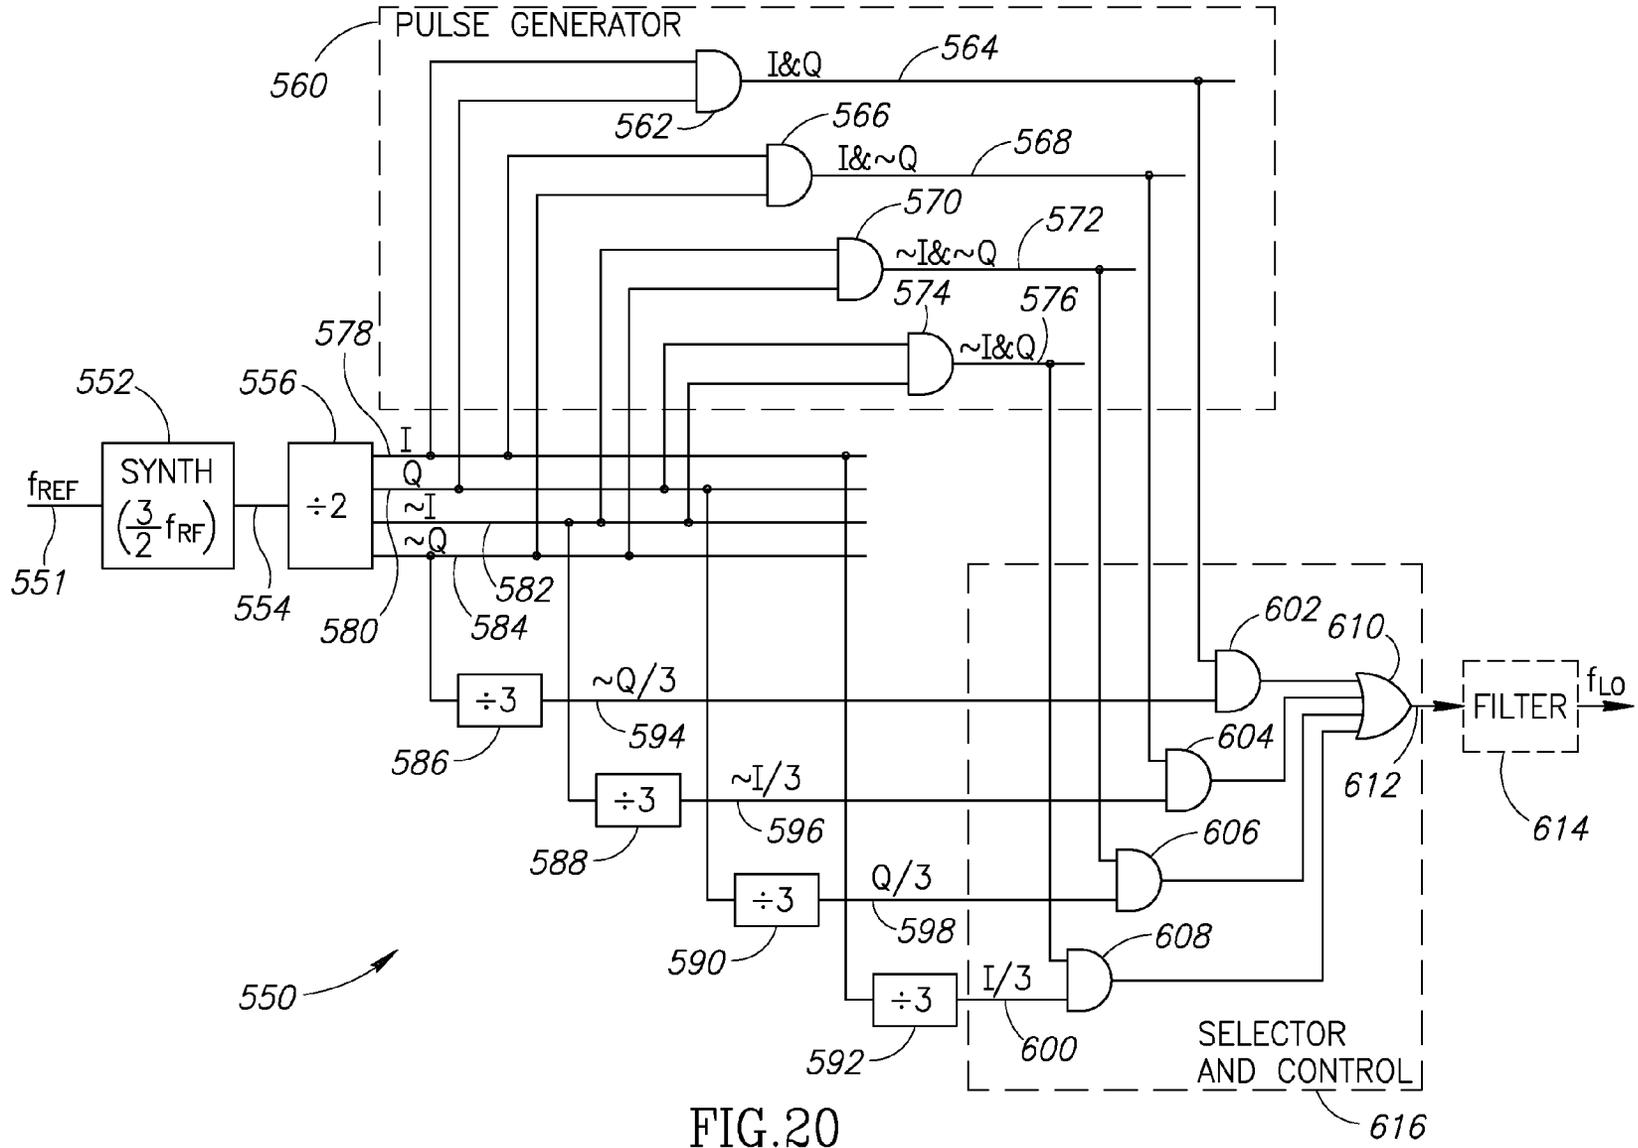


FIG. 20

616

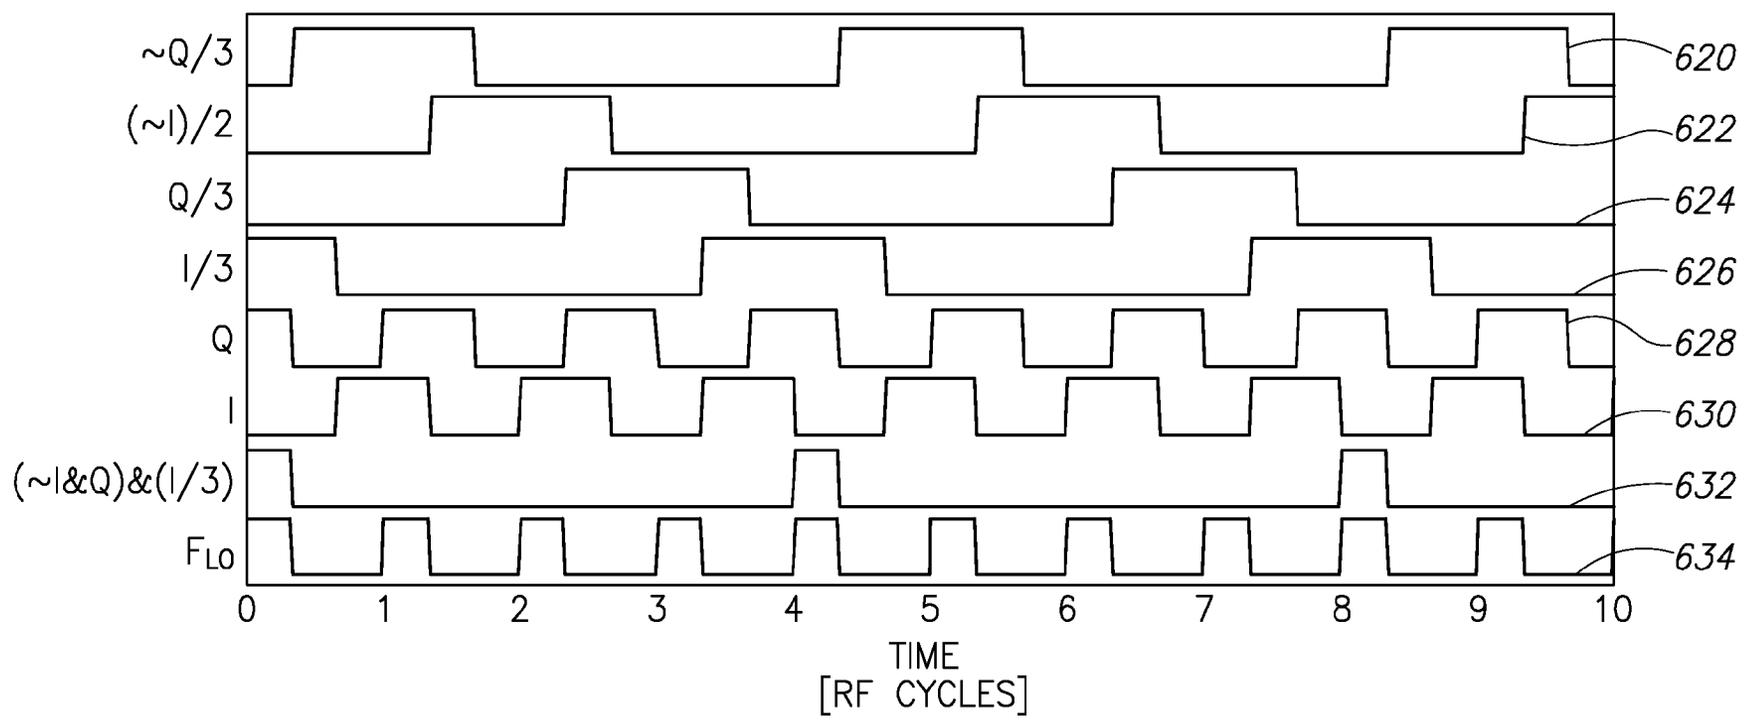


FIG.21

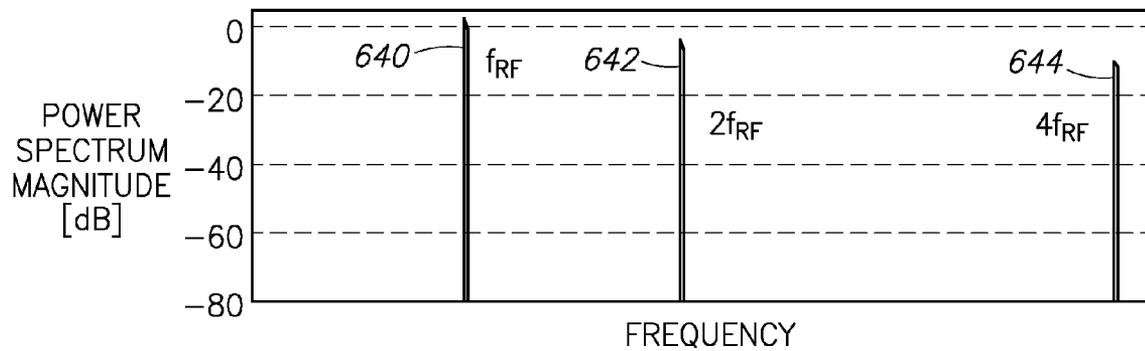


FIG.22

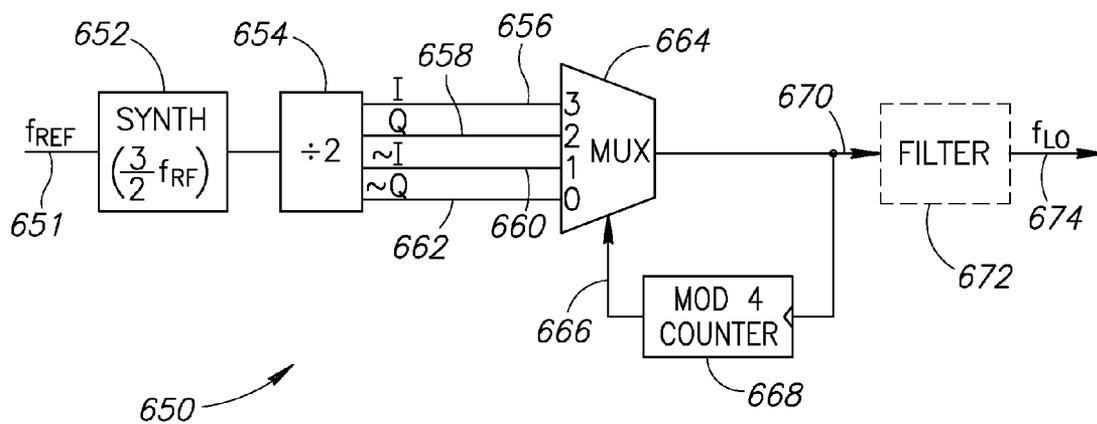


FIG.23



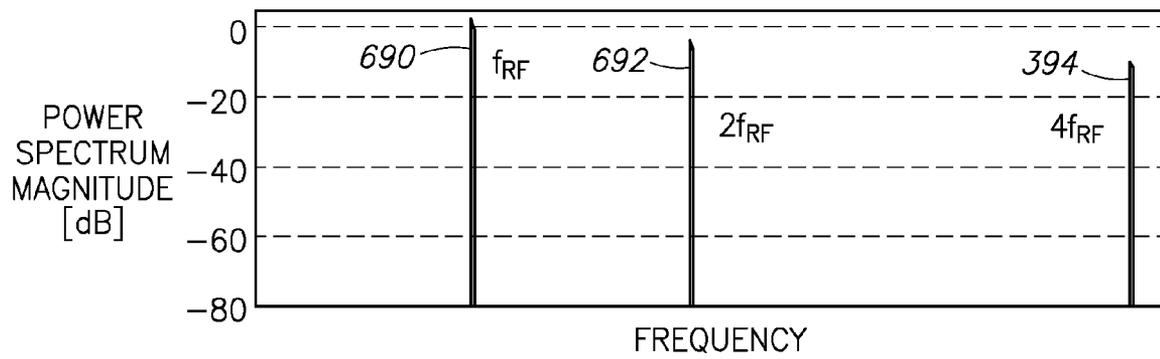


FIG.25

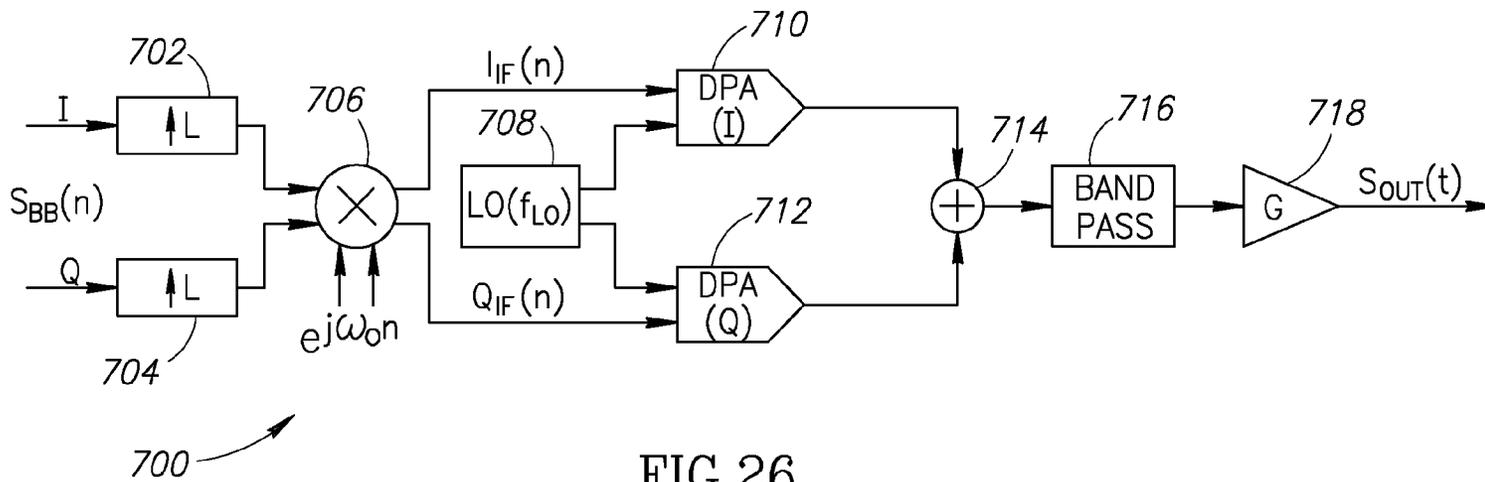


FIG. 26

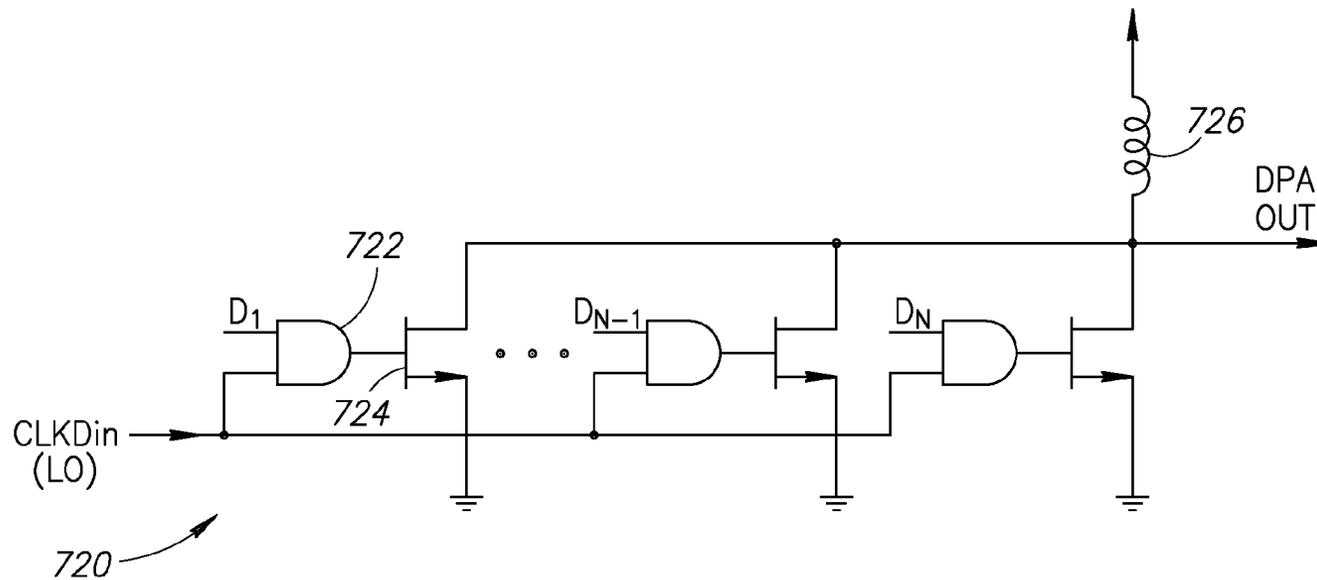


FIG. 27

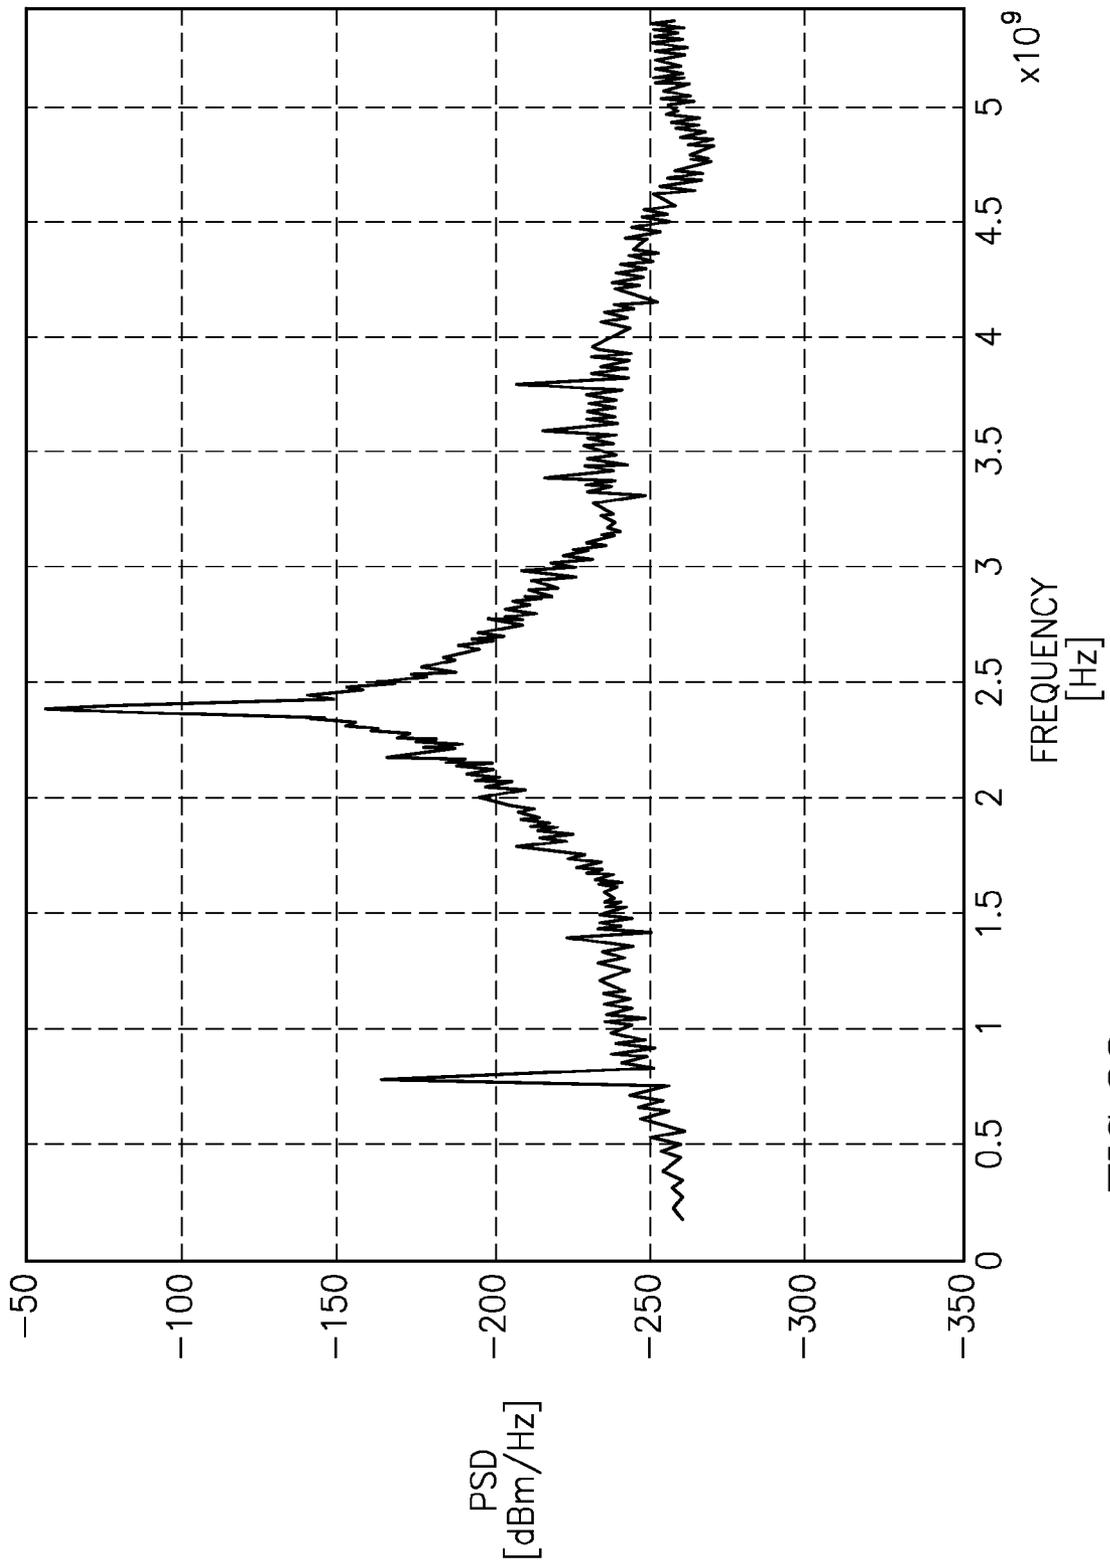


FIG. 28

**LOCAL OSCILLATOR WITH  
NON-HARMONIC RATIO BETWEEN  
OSCILLATOR AND RF FREQUENCIES  
USING XOR OPERATION WITH JITTER  
ESTIMATION AND CORRECTION**

REFERENCE TO PRIORITY APPLICATION

This application claims priority to U.S. Provisional Application Ser. No. 60/823,837, filed Aug. 29, 2006, entitled "Generation of Local-Oscillator Signal with Non-Integer Multiplication Ratio Between the Local-Oscillator and the RF Frequencies", incorporated herein by reference in its entirety.

FIELD OF THE INVENTION

The present invention relates to the field of data communications and more particularly relates to a local oscillator (LO) circuit with non-integer multiplication ratio between the local oscillator and RF frequencies.

BACKGROUND OF THE INVENTION

The use of local oscillator generation circuits for wireless transceivers is well known in the art. The local oscillator is generated as a continuous wave (CW) and is then used for quadrature modulation or demodulation of transmitted and received signals respectively. Alternatively, the oscillator can also perform frequency modulation as part of a polar transmitter architecture system.

A block diagram illustrating an example prior art phase locked loop (PLL)-based local oscillator (LO) generator circuit is shown in FIG. 1. The typical PLL LO generation circuit, generally referenced **10**, comprises phase detector (PD) **14**, loop filter or low pass filter (LPF) **18**, controlled oscillator **22**, resonator **26** and frequency divider **28**.

In operation, a reference signal **12**, normally generated by a crystal oscillator, is input to the phase detector **14** along with a divided-down RF frequency continuous wave (CW) **29**. The phase detector, typically implemented as a charge pump or mixer, generates a phase error (PE or PHE) **16** proportional to the phase difference between the  $f_{REF}$  input signal **12** and RF CW signal **29**. The resultant PE signal is then low pass filtered using low pass filter **18** to yield a slow varying frequency command signal **20**.

The frequency command signal is input to a controlled oscillator circuit **22**, typically a voltage controlled oscillator (VCO) or a digitally controlled oscillator (DCO). This oscillator generates an RF signal **24**, the frequency of which roughly depends linearly on the frequency command signal. The oscillator uses a resonator **26** that oscillates in the desired frequency band. Resonator circuits can be inductor-capacitor based (LC) or closed loop inverter chains (ring). The output of the oscillator **22** is the phase locked LO signal  $f_{LO}$  or  $f_{RF}$  which also undergoes division by  $N$  using divider **28** to generate the feedback signal **29** to the phase detector.

A major problem associated with LO generation schemes such as that of FIG. 1 is their susceptibility to RF signal interference. In particular, the resonator used in the circuit (especially inductor based resonators) often picks-up unwanted RF signals and the resonator frequency can be severely perturbed. This phenomenon is known as frequency pulling and is defined as an effect that forces the frequency of an oscillator or resonant frequency to change from a desired value. Causes of the pulling include undesired coupling to another frequency source (e.g., RF intermediate or output

signals) or the influence of changes in the oscillator load impedance. Typically, the interferer is either the modulated amplified output RF signal, its harmonics in transmitters or the amplified received signal in receivers. To avoid frequency pulling, a well defined RF transceiver system is built such that the actual resonance frequency of the resonator is neither the output RF frequency, nor any of its harmonics or sub-harmonics.

In the case of a mobile wireless system, for example, transmitters that modulate a non-constant envelope signal require a non-integer ratio between the local oscillator frequency and the RF frequency in order to overcome the pulling effect of the power amplifier's output harmonics. Transmission of a wideband signal in high frequency bands such as 5 GHz, however, requires complicated converters that run at very high frequencies.

A block diagram illustrating an example prior art  $1/2 \times$  local oscillator generation scheme is shown in FIG. 2. The example circuit, generally referenced **170**, comprises a synthesizer at  $1/2 f_{RF}$ ,  $\times 2$  frequency doubler **176** and polyphase filter **180**. In this example LO generation circuit, the input reference frequency  $f_{REF}$  **171** is input to synthesizer **172** tuned to exactly  $1/2$  the RF frequency  $1/2 f_{RF}$ . The output signal **174** is then input to a frequency doubler **176** to generate a signal at  $f_{RF}$ . This signal is then filtered via polyphase filter **180** to yield I and Q (i.e. separated by 90 degrees, also referred to as quadrature) output clock signals  $f_{LOI}$  **182** and  $f_{LOQ}$  **184**, respectively, at  $f_{RF}$ . The polyphase filter is needed in order to generate the quadrature output signals. An advantage of this scheme is the fact that the actual oscillation frequency is not the final output frequency but is half. Although the circuit generates  $f_{RF}$  signals, a major disadvantage of using the polyphase filter is that they are typically large and inaccurate filters causing a potentially large IQ mismatch, i.e. LOI and LOQ are not strictly 90 degrees apart. If such a synthesizer solution is inductor based then halving the frequency forces the size of the inductors to increase significantly.

A block diagram illustrating an example prior art  $2 \times$  local oscillator generation scheme is shown in FIG. 3. The well known and widely used LO generation scheme ( $2 \times$  scheme), generally referenced **190**, comprises synthesizer **194** and frequency divider **198**. A crystal oscillator generated reference signal **192** is input to a synthesizer **194** tuned exactly to twice the RF frequency ( $2 f_{RF}$ ). The resultant output signal **196** is then divided by two using a frequency divider **198** to generate two signals having a quadrature relationship, i.e. I and Q output signals  $f_{LOI}$  **200** and  $f_{LOQ}$  **202**, respectively, at  $f_{RF}$ .

These signals can be used to modulate or demodulate a signal using a mixer pair in a zero IF (ZIF) or a near zero IF (NZIF) scheme. The advantages of this scheme is the fact that the actual oscillation frequency is not the final output frequency but its double and that it is relatively easy to generate a clean quadrature pair  $f_{LOI}$  and  $f_{LOQ}$  using a frequency divider **198**.

Two major disadvantages of this scheme, however, are (1) the fact that the second harmonic of the amplified RF signal at  $2 f_{RF}$  can pull the oscillator away, since there could be a small offset between these two frequencies due to data modulation and (2) that the oscillator must be designed to twice the frequency (generally design at high frequencies tends to be more difficult). The first disadvantage can manifest itself in second harmonic leakage from the system output coupling back into the heart of the resonator or the first harmonic coupling back into the synthesizer supply circuitry and generating the second harmonic using a non-linear effect and creating frequency pulling. Another manifestation of this disadvantage can be in the receiver where a high gain version of

the input signal at  $f_{RF}$ , when compressing a certain stage of the reception chain can create a second harmonic, which will also pull the oscillator (i.e. injection pulling or, worse, injection locking). Injection locking occurs when the oscillations of a first system influences a second system to the extent where the second system no longer oscillates at its own natural frequency but rather at the frequency of the first system. In the case of injection pulling, the second system can still oscillate at its own natural frequency, but contains energy at the frequency of the first system. For near-zero IF systems, such injection locking can cause the oscillator to be pulled down or up to the actual RF frequency thus making the system effectively a poorly designed zero-IF system.

To avoid these disadvantages, the LO can be generated at a rational multiplier of the output RF frequency. A block diagram illustrating an example prior art local oscillator generation scheme that generates the LO at a rational multiplier ( $\frac{1}{3}f_{RF}$ , in this example) of the output RF frequency is shown in FIG. 4. The prior art LO generation circuit, generally referenced **210**, generates the LO at a rational multiplier of the output RF frequency and uses dividers and mixers to generate the output RF frequency. The circuit **210** comprises a synthesizer **214**, frequency dividers **216**, **220**, multipliers **222**, **224** and band pass filters (BPF) **226**, **228**.

The scheme of FIG. 4 is typically known as an offset-LO generator. A crystal oscillator output reference signal **212** is input to a synthesizer (PLL) tuned to exactly  $\frac{1}{3}f_{RF}$ . Its output signal is divided by two using frequency divider **216** to yield a signal at  $\frac{2}{3}f_{RF}$  **218**. This signal is divided by two again using frequency divider **220** to yield a quadrature signal pair **221**, **223** at  $\frac{1}{3}f_{RF}$ . Signals **221**, **223** are mixed with signal **218** separately via analog mixers **222**, **224**, respectively. Due to the multiplicative nature of the mixer it generates a product at  $f_{RF}$  (its inputs having frequencies of  $\frac{1}{3}f_{RF}$ , and  $\frac{2}{3}f_{RF}$ ) while signals **221**, **223** also have a 90 degree phase difference at  $f_{RF}$  and thus constitute a quadrature pair. Since the mixer is not ideal, however, undesired frequency products at  $n/3 f_{RF}$  (where  $n$  is an integer,  $n \neq 3$ ) will also be present at the output of the mixers. Band pass filters **226**, **228** attenuate these unwanted products yielding the final  $LO_I$  ( $f_{LOI}$ ) **230**,  $LO_Q$  ( $f_{LOQ}$ ) **233** signals, respectively.

An advantage of the offset LO scheme **210** is that it is able to generate an LO signal at  $f_{RF}$ , while the resonator oscillates at a rational multiple of  $f_{RF}$  rather than an integer multiple. Hence, no harmonics of the output frequency can interfere with the proper operation of the oscillator. While this circuit generally avoids the frequency pulling phenomena described supra, it has a significant disadvantage in the unwanted products (i.e. spurs) generated by the mixers. These products likely cause spectral emission mask (SEM) violations in the transmitter and can downconvert unwanted jammers or blockers in the receiver. Hence, the spur attenuation or filtering requirement for BPFs **226** and **228** is usually very significant.

It is thus desirable to have a local oscillator generation mechanism that overcomes the disadvantage of the prior art techniques. The local oscillator generation mechanism should preferably be implementable as an all digital circuit and oscillate at a rational RF frequency multiplier ( $n/m f_{RF}$ ) so as to avoid frequency pulling while reducing or alleviating the need for a stringent BPF. Further, the local oscillator generation mechanism should enable wideband modulation, such as for polar modulation, requiring a relatively simple, all digital implementation.

## SUMMARY OF THE INVENTION

The present invention is a novel and useful apparatus for and method of local oscillator (LO) generation with non-integer multiplication ratio between the local oscillator and RF frequencies. The LO generation schemes presented herein are operative to generate I and Q square waves at a designated frequency while avoiding the well known issue of harmonic pulling.

The novel LO synthesis schemes described herein are suitable for use in any application requiring the generation of a local oscillator signal having a non-integer multiplication ratio between the local oscillator signal and the output RF frequencies. An example application is provided of a single chip radio, e.g., Bluetooth, GSM, etc., that integrates the RF circuitry with the digital base band (DBB) circuitry on the same die or on close proximity thereto such that frequency pulling would otherwise occur if not for the use of the present invention.

In a first LO generation scheme, the basic PLL structure runs at  $\frac{1}{3}$  the desired frequency  $f_{RF}$ . This frequency is divided by two to obtain in-phase and quadrature square waves at  $\frac{2}{3}f_{RF}$ . The in-phase signal is divided by two again to obtain in-phase and quadrature square waves at  $\frac{1}{3}f_{RF}$ . The signals are then logically combined (i.e. combined using digital logic) using XOR operations to obtain I and Q branch signals containing spectral spurs. Since the spurs are located in non-disturbing bands, they can be filtered out.

One of the major advantages of this first scheme is that although a "mixing" occurs at a rate of  $\frac{1}{4}f_{RF}$ , side-bands at a relative distance of  $\frac{1}{4}f_{RF}$  are avoided. This is achieved without the need for image rejection mixing, thus avoiding another well known problem of timing and amplitude mismatches. Further, most of the operations in the LO generation scheme are implemented digitally utilizing an ADPLL and followed by two divide by two operations and a digital mixer using logical gates.

In a second LO generation scheme, the use of analog mixers of the prior art is avoided and replaced with an XOR gate configured to generate the correct average frequency. The edges are dynamically adjusted by  $\pm T/12$  or zero based on the state of the controlled oscillator down-divided clock.

In a third LO generation scheme, the signal is input to a synthesizer times to a rational multiplier of the RF frequency  $n/m f_{RF}$ . The signal is then divided by  $N$  to generate a plurality of phases of the divided signal. A plurality of combination signals are generated which are then multiplied by a set of weights and summed to cancel out some undesired products. The result is filtered to generate the LO output signal.

In a fourth LO generation scheme, the signal is input to a synthesizer times to a rational multiplier of the RF frequency  $L/N f_{RF}$ . The clock signal is then divided by a factor  $Q$  to form  $2Q$  phases of the clock at a frequency of  $L(N*Q) f_{RF}$ . Each phase then undergoes division by  $L$ . The phase signals are input to a pulse generator which outputs a plurality of pulses. The pulses are input to a selector which selects which signal to output at any point in time. By controlling the selector, the output clock is generated as a TDM based signal. Any spurs are removed by an optional filter.

In a fifth LO generation scheme, the input baseband signal is interpolated and upconverted in the digital domain to an IF. The LO operates at a frequency which is a  $n/m$  division of the target RF frequency  $f_{RF}$ . The IF frequency is configured to  $\frac{1}{2}$  of the LO frequency. The upconverted IF signal is then converted to the analog domain via digital power amplifiers followed by voltage combiners. The output of the combiners is band pass filtered to extract the desired replica.

Advantages of the LO generation schemes of the present invention include (1) ensuring that no frequency pulling effects occur since the LO frequency is equal to a non-integer multiple of the RF output frequency; (2) the schemes presented herein are applicable to numerous standards such as PFD, etc.; and (3) the schemes allow for simpler implementation of a DRP based radio at high frequency bands.

Note that some aspects of the invention described herein may be constructed as software objects that are executed in embedded devices as firmware, software objects that are executed as part of a software application on either an embedded or non-embedded computer system such as a digital signal processor (DSP), microcomputer, minicomputer, microprocessor, etc. running a real-time operating system such as WinCE, Symbian, OSE, Embedded LINUX, etc. or non-real time operating system such as Windows, UNIX, LINUX, etc., or as soft core realized HDL circuits embodied in an Application Specific Integrated Circuit (ASIC) or Field Programmable Gate Array (FPGA), or as functionally equivalent discrete hardware components.

There is thus provided in accordance with the present invention, an apparatus for generating a local oscillator signal having an output frequency, comprising an oscillator circuit operative to generate a first signal at a first frequency, a delay circuit coupled to the oscillator circuit and operative to delay the first signal by substantially one-quarter period to generate a second signal therefrom, a divider coupled to the oscillator circuit and operative to divide the first signal to generate a third signal therefrom at a second frequency, an XOR circuit operative to XOR the second signal and the third signal to generate a fourth signal therefrom and means for dynamically adjusting the edges of the fourth signal in accordance with the state of the second signal and the third signal to generate an output signal having an average frequency substantially equal to the output frequency.

There is also provided in accordance with the present invention, an apparatus for generating a local oscillator signal having an output frequency, comprising an oscillator circuit operative to generate a first signal and a second delayed signal at a first frequency, a divider coupled to the oscillator circuit and operative to divide the first signal to generate a third signal therefrom at a second frequency, means for logically mixing the second signal and the third signal to generate a fourth signal therefrom and means for dynamically adjusting the edges of the fourth signal to generate an output signal having an average frequency substantially equal to the output frequency.

There is further provided in accordance with the present invention, an apparatus for generating a local oscillator signal having an output frequency, comprising an oscillator circuit operative to generate a first signal at a first frequency, a first delay circuit coupled to the oscillator circuit and operative to delay the first signal by substantially one-quarter period to generate a second signal therefrom, a divider coupled to the oscillator circuit and operative to divide the first signal to generate a third signal therefrom at a second frequency, a second delay circuit operative to delay the second signal to generate a fourth signal therefrom, a third delay circuit operative to delay the second signal to generate a fifth signal therefrom and a multiplexer operative to select one of the third signal, the fourth signal and the fifth signal as an output signal having an average frequency substantially equal to the output frequency in accordance with the state of the second signal and the third signal.

There is also provided in accordance with the present invention, a method of generating a local oscillator signal having an output frequency, the method comprising the steps

of first generating a first signal at a first frequency, second generating a second signal delayed from the first signal, dividing the first signal to generate a third signal therefrom at a second frequency, logically XORing the second signal and the third signal to generate a fourth signal therefrom and dynamically adjusting edges of the fourth signal in accordance with the state of the second signal and the third signal to generate an output signal having a frequency substantially equal to the output frequency.

There is further provided in accordance with the present invention, a radio comprising a transmitter coupled to an antenna, the transmitter comprising a local oscillator having an output frequency, the local oscillator comprising an oscillator circuit operative to generate a first signal at a first frequency and a second signal delayed from the first signal, a divider coupled to the oscillator circuit and operative to divide the first signal to generate a third signal therefrom at a second frequency, an logic combiner circuit operative to logically combine the second signal and the third signal to generate a fourth signal therefrom, means for dynamically adjusting the edges of the fourth signal in accordance with the state of the second signal and the third signal to generate an output signal having an average frequency substantially equal to the output frequency, a receiver coupled to the antenna and a baseband processor coupled to the transmitter and the receiver.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention is herein described, by way of example only, with reference to the accompanying drawings, wherein:

FIG. 1 is a block diagram illustrating an example prior art phase locked loop (PLL) local oscillator (LO) generator circuit;

FIG. 2 is a block diagram illustrating an example prior art  $\frac{1}{2}\times$  local oscillator generation scheme;

FIG. 3 is a block diagram illustrating an example prior art  $2\times$  local oscillator generation scheme;

FIG. 4 is a block diagram illustrating an example prior art local oscillator generation scheme that generates the LO at a rational multiplier of the output RF frequency;

FIG. 5 is a block diagram illustrating a single chip polar transceiver radio incorporating an all-digital local oscillator based transmitter and receiver and local oscillator (LO) generation mechanism of the present invention;

FIG. 6 is a simplified block diagram illustrating an example mobile communication device incorporating the local oscillator generation mechanism of the present invention;

FIG. 7 is a block diagram illustrating an example all digital phase locked loop (ADPLL) incorporating the local oscillator generation mechanism of the present invention;

FIG. 8 is a block diagram illustrating a first embodiment of the local oscillator generation mechanism of the present invention employing an offset LO generator;

FIG. 9 is a timing diagram illustrating the various digital traces for the first embodiment local oscillator generation mechanism of the present invention shown in FIG. 8;

FIG. 10 is a graph illustrating the spectrum magnitude plot of the output of the circuit of FIG. 8;

FIG. 11 is a block diagram illustrating a second embodiment of the local oscillator generation mechanism of the present invention;

FIG. 12 is a timing diagram illustrating the various time domain traces for the second embodiment local oscillator generation mechanism of the present invention shown in FIG. 11;

FIG. 13 is a block diagram illustrating a third embodiment of the local oscillator generation mechanism of the present invention;

FIG. 14 is a block diagram illustrating a fourth embodiment of the local oscillator generation mechanism of the present invention;

FIG. 15 is a block diagram illustrating a fifth embodiment of the local oscillator generation mechanism of the present invention;

FIG. 16 is a phasor diagram illustrating the relationship between the products generated in the LO generation circuit of FIG. 15;

FIG. 17 is a timing diagram illustrating the various time domain traces for the fifth embodiment local oscillator generation mechanism of the present invention shown in FIG. 15;

FIG. 18 is a graph illustrating the spectrum magnitude plot of the output of the circuit of FIG. 15;

FIG. 19 is a block diagram illustrating a sixth embodiment of the local oscillator generation mechanism of the present invention;

FIG. 20 is a block diagram illustrating a seventh embodiment of the local oscillator generation mechanism of the present invention;

FIG. 21 is a timing diagram illustrating the various time domain traces for the seventh embodiment local oscillator generation mechanism of the present invention shown in FIG. 20;

FIG. 22 is a graph illustrating the spectrum magnitude plot of the output of the circuit of FIG. 20;

FIG. 23 is a block diagram illustrating an eighth embodiment of the local oscillator generation mechanism of the present invention;

FIG. 24 is a timing diagram illustrating the various time domain traces for the eighth embodiment local oscillator generation mechanism of the present invention shown in FIG. 23;

FIG. 25 is a graph illustrating the spectrum magnitude plot of the output of the circuit of FIG. 23;

FIG. 26 is a block diagram illustrating a ninth embodiment of the local oscillator generation mechanism of the present invention incorporating the Cartesian based non-integer local oscillator;

FIG. 27 is a simplified block diagram illustrating the DPA of the local oscillator generation circuit of FIG. 26 in more detail; and

FIG. 28 is a graph illustrating simulation results of the spectrum at the output of the transmitter employing the Cartesian based non-integer local oscillator of FIG. 26.

DETAILED DESCRIPTION OF THE INVENTION

Notation Used Throughout

The following notation is used throughout this document.

Term	Definition
AC	Alternating Current
ACL	Asynchronous Connectionless Link
ACW	Amplitude Control Word
ADC	Analog to Digital Converter
ADPLL	All Digital Phase Locked Loop
AM	Amplitude Modulation
ASIC	Application Specific Integrated Circuit
AVI	Audio Video Interface
AWS	Advanced Wireless Services

-continued

Term	Definition
5 BIST	Built-In Self Test
BMP	Windows Bitmap
BPF	Band Pass Filter
CMOS	Complementary Metal Oxide Semiconductor
CPU	Central Processing Unit
CU	Control Unit
10 CW	Continuous Wave
DAC	Digital to Analog Converter
dB	Decibel
DBB	Digital Baseband
DC	Direct Current
DCO	Digitally Controlled Oscillator
15 DCXO	Digitally Controlled Crystal Oscillator
DPA	Digitally Controlled Power Amplifier
DRAC	Digital to RF Amplitude Conversion
DRP	Digital RF Processor or Digital Radio Processor
DSL	Digital Subscriber Line
DSP	Digital Signal Processor
20 EDGE	Enhanced Data Rates for GSM Evolution
EDR	Enhanced Data Rate
EEPROM	Electrically Erasable Programmable Read Only Memory
EPROM	Erasable Programmable Read Only Memory
eSCO	Extended Synchronous Connection-Oriented
FCC	Federal Communications Commission
FCW	Frequency Command Word
25 FIB	Focused Ion Beam
FM	Frequency Modulation
FPGA	Field Programmable Gate Array
GMSK	Gaussian Minimum Shift Keying
GPS	Global Positioning System
GSM	Global System for Mobile communications
30 HB	High Band
HDL	Hardware Description Language
HFP	Hands Free Protocol
I/F	Interface
IC	Integrated Circuit
IEEE	Institute of Electrical and Electronics Engineers
35 IIR	Infinite Impulse Response
JPG	Joint Photographic Experts Group
LAN	Local Area Network
LB	Low Band
LDO	Low Drop Out
LO	Local Oscillator
LPF	Low Pass Filter
40 MAC	Media Access Control
MAP	Media Access Protocol
MBOA	Multiband OFDM Alliance
MIM	Metal Insulator Metal
Mod	Modulo
MOS	Metal Oxide Semiconductor
45 MP3	MPEG-1 Audio Layer 3
MPG	Moving Picture Experts Group
MUX	Multiplexer
NZIF	Near Zero IF
OFDM	Orthogonal Frequency Division Multiplexing
PA	Power Amplifier
50 PAN	Personal Area Network
PC	Personal Computer
PCI	Personal Computer Interconnect
PD	Phase Detector
PDA	Personal Digital Assistant
PE	Phase Error
55 PHE	Phase Error
PLL	Phase Locked Loop
PM	Phase Modulation
PPA	Pre-Power Amplifier
QoS	Quality of Service
RAM	Random Access Memory
60 RF	Radio Frequency
RFBIST	RF Built-In Self Test
RMS	Root Mean Squared
ROM	Read Only Memory
SAM	Sigma-Delta Amplitude Modulation
SAW	Surface Acoustic Wave
SCO	Synchronous Connection-Oriented
65 SEM	Spectral Emission Mask
SIM	Subscriber Identity Module

-continued

Term	Definition
SoC	System on Chip
SRAM	Static Read Only Memory
SYNTH	Synthesizer
TDC	Time to Digital Converter
TDD	Time Division Duplex
TV	Television
UGS	Unsolicited Grant Services
USB	Universal Serial Bus
UWB	Ultra Wideband
VCO	Voltage Controlled Oscillator
WCDMA	Wideband Code Division Multiple Access
WiFi	Wireless Fidelity
WiMAX	Worldwide Interoperability for Microwave Access
WiMedia	Radio platform for UWB
WLAN	Wireless Local Area Network
WMA	Windows Media Audio
WMAN	Wireless Metropolitan Area Network
WMV	Windows Media Video
WPAN	Wireless Personal Area Network
XOR	Exclusive Or
ZIF	Zero IF

#### DETAILED DESCRIPTION OF THE INVENTION

The present invention is a novel and useful apparatus for and method of local oscillator (LO) generation with non-integer multiplication ratio between the local oscillator and RF output frequencies. The invention is suitable for use in any application requiring the generation of a local oscillator signal having a non-integer multiplication ratio between the local oscillator signal and the output RF frequencies. An example application is provided of a single chip radio that integrates the RF circuitry with the digital base band (DBB) circuitry on the same die or on close proximity thereto such that frequency pulling would otherwise occur if not for the use of the present invention.

Although the LO generation mechanism is applicable to numerous wireless communication standards and can be incorporated in numerous types of wireless or wired communication devices such as a multimedia player, mobile station, cellular phone, PDA, DSL modem, WPAN device, etc., it is described in the context of a digital RF processor (DRP) based transmitter that may be adapted to comply with a particular wireless communications standard such as GSM, Bluetooth, EDGE, WCDMA, WLAN, WiMax, etc. It is appreciated, however, that the invention is not limited to use with any particular communication standard and may be used in optical, wired and wireless applications. Further, the invention is not limited to use with a specific modulation scheme but is applicable to any modulation scheme including both digital and analog modulations where there is a need to mitigate the frequency pulling effect of the RF output frequency on the reference frequency clock generation.

Note that throughout this document, the term communications device is defined as any apparatus or mechanism adapted to transmit, receive or transmit and receive data through a medium. The term communications transceiver or communications device is defined as any apparatus or mechanism adapted to transmit and receive data through a medium. The communications device or communications transceiver may be adapted to communicate over any suitable medium, including wireless or wired media. Examples of wireless media include RF, infrared, optical, microwave, UWB, Bluetooth, WiMAX, WiMedia, WiFi, or any other broadband medium, etc. Examples of wired media include twisted pair,

coaxial, optical fiber, any wired interface (e.g., USB, Firewire, Ethernet, etc.). The term Ethernet network is defined as a network compatible with any of the IEEE 802.3 Ethernet standards, including but not limited to 10Base-T, 100Base-T or 1000Base-T over shielded or unshielded twisted pair wiring. The terms communications channel, link and cable are used interchangeably. The notation DRP is intended to denote either a Digital RF Processor or Digital Radio Processor. References to a Digital RF Processor infer a reference to a Digital Radio Processor and vice versa.

The term multimedia player or device is defined as any apparatus having a display screen and user input means that is capable of playing audio (e.g., MP3, WMA, etc.), video (AVI, MPG, WMV, etc.) and/or pictures (JPG, BMP, etc.). The user input means is typically formed of one or more manually operated switches, buttons, wheels or other user input means. Examples of multimedia devices include pocket sized personal digital assistants (PDAs), personal media player/recorders, cellular telephones, handheld devices, and the like.

Some portions of the detailed descriptions which follow are presented in terms of procedures, logic blocks, processing, steps, and other symbolic representations of operations on data bits within a computer memory. These descriptions and representations are the means used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art. A procedure, logic block, process, etc., is generally conceived to be a self-consistent sequence of steps or instructions leading to a desired result. The steps require physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared and otherwise manipulated in a computer system. It has proven convenient at times, principally for reasons of common usage, to refer to these signals as bits, bytes, words, values, elements, symbols, characters, terms, numbers, or the like.

It should be born in mind that all of the above and similar terms are to be associated with the appropriate physical quantities they represent and are merely convenient labels applied to these quantities. Unless specifically stated otherwise as apparent from the following discussions, it is appreciated that throughout the present invention, discussions utilizing terms such as 'processing,' 'computing,' 'calculating,' 'determining,' 'displaying' or the like, refer to the action and processes of a computer system, or similar electronic computing device, that manipulates and transforms data represented as physical (electronic) quantities within the computer system's registers and memories into other data similarly represented as physical quantities within the computer system memories or registers or other such information storage, transmission or display devices.

The invention can take the form of an entirely hardware embodiment, an entirely software embodiment or an embodiment containing a combination of hardware and software elements. In one embodiment, a portion of the mechanism of the invention is implemented in software, which includes but is not limited to firmware, resident software, object code, assembly code, microcode, etc.

Furthermore, the invention can take the form of a computer program product accessible from a computer-usable or computer-readable medium providing program code for use by or in connection with a computer or any instruction execution system. For the purposes of this description, a computer-usable or computer readable medium is any apparatus that can contain, store, communicate, propagate, or transport the program for use by or in connection with the instruction execution system, apparatus, or device, e.g., floppy disks, remov-

able hard drives, computer files comprising source code or object code, flash semiconductor memory (USB flash drives, etc.), ROM, EPROM, or other semiconductor memory devices.

### Single Chip Radio

A block diagram illustrating a single chip polar transceiver radio incorporating an all-digital local oscillator based transmitter and receiver and local oscillator (LO) generation mechanism of the present invention is shown in FIG. 5. For illustration purposes only, the transmitter, as shown, is adapted for the GSM/EDGE/WCDMA cellular standards. It is appreciated, however, that one skilled in the communication arts can adapt the transmitter illustrated herein to other modulations and communication standards as well without departing from the spirit and scope of the present invention.

The radio, generally referenced 30, comprises a radio integrated circuit 31 coupled to a crystal 38, front end module 46 coupled to an antenna 44, and battery management circuit 32 coupled to battery 68. The radio chip 31 comprises a script processor 60, digital baseband (DBB) processor 61, memory 62 (e.g., static RAM), TX block 42, RX block 58, digitally controlled crystal oscillator (DCXO) 50, slicer 51, power management unit 34 and RF built-in self test (BIST) 36. The TX block comprises high speed and low speed digital logic block 40 including  $\Sigma\Delta$  modulators 52, 54, digitally controlled oscillator (DCO) 56, non-integer divider block 59 and digitally controlled power amplifier (DPA) 48. The RX block comprises a low noise transconductance amplifier 63, current sampler 64, discrete time processing block 65, analog to digital converter (ADC) 66 and digital logic block 67.

The principles presented herein have been used to develop three generations of a Digital RF Processor (DRP): single-chip Bluetooth, GSM and GSM/EDGE radios realized in 130 nm, 90 nm and 65 nm digital CMOS process technologies, respectively. This architecture is also used as the foundation for a UMTS single-chip radio manufactured using a 45 nm CMOS process. The common architecture is highlighted in FIG. 5 with features added specific to the cellular radio. The all digital phase locked loop (ADPLL) based transmitter employs a polar architecture with all digital phase/frequency and amplitude modulation paths. The receiver employs a discrete-time architecture in which the RF signal is directly sampled and processed using analog and digital signal processing techniques.

A key component is the digitally controlled oscillator (DCO) 56, which avoids any analog tuning controls. A digitally-controlled crystal oscillator (DCXO) generates a high-quality base station-synchronized frequency reference such that the transmitted carrier frequencies and the received symbol rates are accurate to within 0.1 ppm. Fine frequency resolution is achieved through high-speed  $\Sigma\Delta$  dithering of its varactors. Digital logic built around the DCO realizes an all-digital PLL (ADPLL) that is used as a local oscillator for both the transmitter and receiver. In accordance with the invention, the output of the DCO undergoes non-integer open-loop division using non-integer divider block 59. The polar transmitter architecture utilizes the wideband direct frequency modulation capability of the ADPLL and a digitally controlled power amplifier (DPA) 48 for the amplitude modulation. The DPA operates in near-class-E mode and uses an array of nMOS transistor switches to regulate the RF amplitude. It is followed by a matching network and an external front-end module 46, which comprises a power amplifier (PA), a transmit/receive switch for the common antenna 44

and RX surface acoustic wave (SAW) filters. Fine amplitude resolution is achieved through high-speed  $\Sigma\Delta$  dithering of the DPA nMOS transistors.

The receiver 58 employs a discrete-time architecture in which the RF signal is directly sampled at the Nyquist rate of the RF carrier and processed using analog and digital signal processing techniques. The transceiver is integrated with a script processor 60, dedicated digital base band processor 61 (i.e. ARM family processor and/or DSP) and SRAM memory 62. The script processor handles various TX and RX calibration, compensation, sequencing and lower-rate data path tasks and encapsulates the transceiver complexity in order to present a much simpler software programming model.

The frequency reference (FREF) is generated on-chip by a 26 MHz (or any other desired frequency, such as 13 or 38.4 MHz) digitally controlled crystal oscillator (DCXO) 50 coupled to slicer 51. The output of the slicer is input to the TDC circuit 69.

An integrated power management (PM) system 34 is connected to an external battery management circuit 32 that conditions and stabilizes the supply voltage. The PM comprises multiple low drop out (LDO) regulators that provide internal supply voltages and also isolate supply noise between circuits, especially protecting the DCO. The RF built-in self-test (RFBIST) 36 performs autonomous phase noise and modulation distortion testing, various loopback configurations for bit-error rate measurements and implements the DPA calibration and BIST mechanism. The transceiver is integrated with the digital baseband, SRAM memory in a complete system-on-chip (SoC) solution. Almost all the clocks on this SoC are derived from and are synchronous to the RF oscillator clock. This helps to reduce susceptibility to the noise generated through clocking of the massive digital logic.

The transmitter comprises a polar architecture in which the amplitude and phase/frequency modulations are implemented in separate paths. Transmitted symbols generated in the digital baseband (DBB) processor are first pulse-shape filtered in the Cartesian coordinate system. The filtered in-phase (I) and quadrature (Q) samples are then converted through a CORDIC algorithm into amplitude and phase samples of the polar coordinate system. The phase is then differentiated to obtain frequency deviation. The polar signals are subsequently conditioned through signal processing to sufficiently increase the sampling rate in order to reduce the quantization noise density and lessen the effects of the modulating spectrum replicas.

A more detailed description of the operation of the ADPLL can be found in U.S. Patent Publication No. 2006/0033582A1, published Feb. 16, 2006, to Staszewski et al., entitled "Gain Calibration of a Digital Controlled Oscillator," U.S. Patent Publication No. 2006/0038710A1, published Feb. 23, 2006, Staszewski et al., entitled "Hybrid Polar/Cartesian Digital Modulator" and U.S. Pat. No. 6,809,598, to Staszewski et al., entitled "Hybrid Of Predictive And Closed-Loop Phase-Domain Digital PLL Architecture," all of which are incorporated herein by reference in their entirety.

### Mobile Device/Cellular Phone/PDA System

A simplified block diagram illustrating an example mobile communication device incorporating the local oscillator generation mechanism of the present invention is shown in FIG. 6. The communication device may comprise any suitable wired or wireless device such as a multimedia player, mobile station, mobile device, cellular phone, PDA, wireless personal area network (WPAN) device, Bluetooth EDR device,

etc. For illustration purposes only, the communication device is shown as a cellular phone or smart phone. Note that this example is not intended to limit the scope of the invention as the LO generation mechanism of the present invention can be implemented in a wide variety of wireless and wired communication devices.

The cellular phone, generally referenced **70**, comprises a baseband processor or CPU **71** having analog and digital portions. The basic cellular link is provided by the RF transceiver **94** and related one or more antennas **96, 98**. A plurality of antennas is used to provide antenna diversity which yields improved radio performance. The cell phone also comprises internal RAM and ROM memory **110**, Flash memory **112** and external memory **114**.

In accordance with the invention, the RF transceiver comprises a non-integer LO divider block **97** that generates an RF frequency  $f_{RF}$  where the RF output frequency is a non-integer multiple of the LO circuit frequency, as described in more detail infra. In operation, the LO generation mechanism may be implemented as hardware, as software executed as a task on the baseband processor **71** or a combination of hardware and software. Implemented as a software task, the program code operative to implement the frequency generation mechanism of the present invention is stored in one or more memories **110, 112** or **114**.

Several user interface devices include microphone **84**, speaker **82** and associated audio codec **80**, a keypad for entering dialing digits **86**, vibrator **88** for alerting a user, camera and related circuitry **100**, a TV tuner **102** and associated antenna **104**, display **106** and associated display controller **108** and GPS receiver **90** and associated antenna **92**.

A USB interface connection **78** provides a serial link to a user's PC or other device. An FM receiver **72** and antenna **74** provide the user the ability to listen to FM broadcasts. WLAN radio and interface **76** and antenna **77** provide wireless connectivity when in a hot spot or within the range of an ad hoc, infrastructure or mesh based wireless LAN network. A Bluetooth EDR radio and interface **73** and antenna **75** provide Bluetooth wireless connectivity when within the range of a Bluetooth wireless network. Further, the communication device **70** may also comprise a WiMAX radio and interface **123** and antenna **125**. SIM card **116** provides the interface to a user's SIM card for storing user data such as address book entries, etc. The communication device **70** also comprises an Ultra Wideband (UWB) radio and interface **83** and antenna **81**. The UWB radio typically comprises an MBOA-UWB based radio.

Portable power is provided by the battery **124** coupled to battery management circuitry **122**. External power is provided via USB power **118** or an AC/DC adapter **120** connected to the battery management circuitry which is operative to manage the charging and discharging of the battery **124**.

#### ADPLL Polar Transmitter Incorporating LO Generation Mechanism

A block diagram illustrating an ADPLL-based polar transmitter for wireless applications incorporating the LO generation mechanism of the present invention is shown in FIG. 7. A more detailed description of the operation of the ADPLL can be found in U.S. Patent Publication No. 2006/0033582A1, published Feb. 16, 2006, to Staszewski et al., entitled "Gain Calibration of a Digital Controlled Oscillator," U.S. Patent Publication No. 2006/0038710A1, published Feb. 23, 2006, Staszewski et al., entitled "Hybrid Polar/Cartesian Digital Modulator" and U.S. Pat. No. 6,809,598, to Staszewski et al., entitled "Hybrid Of Predictive And Closed-Loop Phase-Do-

main Digital PLL Architecture," all of which are incorporated herein by reference in their entirety.

For illustration purposes only, the transmitter, as shown, is adapted for the GSM/EDGE/WCDMA cellular standards. It is appreciated, however, that one skilled in the communication arts can adapt the transmitter illustrated herein to other modulations and communication standards as well without departing from the spirit and scope of the present invention.

The transmitter, generally referenced **130**, is well-suited for a deep-submicron CMOS implementation. The transmitter comprises a complex pulse shaping filter **168**, amplitude modulation (AM) block **169** and ADPLL **132**. The circuit **130** is operative to perform complex modulation in the polar domain in addition to the generation of the local oscillator (LO) signal for the receiver. All clocks in the system are derived directly from this source. Note that the transmitter is constructed using digital techniques that exploit the high speed and high density of the advanced CMOS, while avoiding problems related to voltage headroom. The ADPLL circuit replaces a conventional RF synthesizer architecture (based on a voltage-controlled oscillator (VCO) and a phase/frequency detector and charge-pump combination), with a digitally controlled oscillator (DCO) **148**, a time-to-digital converter (TDC) **162** and a non-integer LO divider **134**. All inputs and outputs are digital and some even at multi-GHz frequency.

The core of the ADPLL is a digitally controlled oscillator (DCO) **148** adapted to generate the RF oscillator clock CKV. The oscillator core (not shown) operates at a rational multiplier of the 1.6-2.0 GHz (e.g.,  $\frac{4}{3}$ ) high band frequency or at a rational multiplier of the 0.8-1.0 GHz low band frequency (e.g.,  $\frac{4}{3}$ ). The output of the DCO is then divided using a non-integer LO divider **134** in accordance with the present invention for precise generation of RX quadrature signals, and for use as the transmitter's carrier frequency. The single DCO is shared between transmitter and receiver and is used for both the high frequency bands (HB) and the low frequency bands (LB). In addition to the integer control of the DCO, at least 3-bits of the minimal varactor size used are dedicated for  $\Sigma\Delta$  dithering in order to improve frequency resolution. The DCO comprises a plurality of varactor banks, which may be realized as n-poly/n-well inversion type MOS capacitor (MOSCAP) devices or Metal Insulator Metal (MIM) devices that operate in the flat regions of their C-V curves to assist digital control. The output of the DCO is input to the non-integer LO divider **134**, which generates a modulated digital signal at  $f_{RF}$ . This signal is input to the pre-power amplifier (PPA) **152**. It is also input to the RF low band pre-power amplifier **154** after divide by two via divider **150**. Note that alternatively, the loop may be closed by coupling the signal output of the DCO before the non-integer LO divider to the retimer and TDC circuits.

The expected variable frequency  $f_V$  is related to the reference frequency  $f_R$  by the frequency command word (FCW).

$$FCW[k] = \frac{E(f_V[k])}{f_R} \quad (1)$$

The FCW is time variant and is allowed to change with every cycle  $T_R=1/f_R$  of the frequency reference clock. With  $W_F=24$  the word length of the fractional part of FCW, the ADPLL provides fine frequency control with 1.5 Hz accuracy, according to:

15

$$\Delta f_{res} = \frac{f_R}{2W_F} \quad (2)$$

The number of integer bits  $W_F=8$  has been chosen to fully cover the GSM/EDGE and partial WCDMA band frequency range of  $f_F=1,600$ - $2,000$  MHz with an arbitrary reference frequency  $f_R \cong 8$  MHz.

The ADPLL operates in a digitally-synchronous fixed-point phase domain as follows: The variable phase accumulator **156** determines the variable phase  $R_V[i]$  by counting the number of rising clock transitions of the DCO oscillator clock CKV as expressed below.

$$R_V[i] = \sum_{l=0}^i 1 \quad (3)$$

The index  $i$  indicates the DCO edge activity. The variable phase  $R_V[i]$  is sampled via sampler **158** to yield sampled FREF variable phase  $R_V[k]$ , where  $k$  is the index of the FREF edge activity. The sampled FREF variable phase  $R_V[k]$  is fixed-point concatenated with the normalized time-to-digital converter (TDC) **162** output  $\epsilon[k]$ . The TDC measures and quantizes the time differences between the frequency reference FREF and the DCO clock edges. The sampled differentiated (via block **160**) variable phase is subtracted from the frequency command word (FCW) by the digital frequency detector **138**. The frequency error  $f_E[k]$  samples

$$f_E[k] = \text{FCW} - [(R_V[k] - \epsilon[k]) - (R_V[k-1] - \epsilon[k-1])] \quad (4)$$

are accumulated via the frequency error accumulator **140** to create the phase error  $\phi_E[k]$  samples

$$\phi_E[k] = \sum_{l=0}^k f_E[l] \quad (5)$$

which are then filtered by a fourth order IIR loop filter **142** and scaled by a proportional loop attenuator  $\alpha$ . A parallel feed with coefficient  $\rho$  adds an integrated term to create type-II loop characteristics which suppress the DCO flicker noise.

The IIR filter is a cascade of four single stage filters, each satisfying the following equation:

$$y[k] = (1-\lambda) \cdot y[k-1] + \lambda \cdot x[k] \quad (6)$$

wherein

- $x[k]$  is the current input;
- $y[k]$  is the current output;
- $k$  is the time index;
- $\lambda$  is the configurable coefficient;

The 4-pole IIR loop filter attenuates the reference and TDC quantization noise with an 80 dB/dec slope, primarily to meet the GSM/EDGE spectral mask requirements at 400 kHz offset. The filtered and scaled phase error samples are then multiplied by the DCO gain  $K_{DCO}$  normalization factor  $f_R/\hat{K}_{DCO}$  via multiplier **146**, where  $f_R$  is the reference frequency and  $\hat{K}_{DCO}$  is the DCO gain estimate, to make the loop characteristics and modulation independent from  $K_{DCO}$ . The modulating data is injected into two points of the ADPLL for

16

direct frequency modulation, via adders **136** and **144**. A hitless gear-shifting mechanism for the dynamic loop bandwidth control serves to reduce the settling time. It changes the loop attenuator a several times during the frequency locking while adding the  $(\alpha_1/\alpha_2-1)\phi_1$  dc offset to the phase error, where indices 1 and 2 denote before and after the event, respectively. Note that  $\phi_1=\phi_2$ , since the phase is to be continuous.

The frequency reference FREF is input to the retimer **166** and provides the clock for the TDC **162**. The FREF input is resampled by the RF oscillator clock CKV via retimer block **166** which may comprise a flip flop or register clocked by the reference frequency FREF. The resulting retimed clock (CKR) is distributed and used throughout the system. This ensures that the massive digital logic is clocked after the quiet interval of the phase error detection by the TDC. Note that in the example embodiment described herein, the ADPLL is a discrete-time sampled system implemented with all digital components connected with all digital signals.

#### First Embodiment

##### Non-Harmonic DCO With XOR and BPF (Offset LO Generator)

In a first LO generation scheme, the basic PLL structure runs at  $\frac{1}{3}$  the desired frequency  $f_{RF}$ . This frequency is divided by two to obtain in-phase and quadrature square waves at  $\frac{2}{3}f_{RF}$ . It is noted that the division by two would not be necessary if the quadrature generation of the square wave clocks is achieved through some other means. In this case, the oscillator could operate at a lower frequency. The in-phase signal is divided by two again to obtain in-phase and quadrature square waves at  $\frac{1}{3}f_{RF}$ . The signals are then logically mixed using XOR operations to obtain I and Q branch signals containing spectral spurs every  $((2n+1)/3)f_{RF}$ , where  $n$  is an integer. Since the spurs are located in non-disturbing bands, they can be filtered out. In a deep-submicron chip, for example, there is a need for a digital implementation of the above described LO generation scheme.

A block diagram illustrating a first embodiment of the local oscillator generation mechanism of the present invention employing an offset LO generator is shown in FIG. **8**. The circuit, generally referenced **240**, is a fully digital implementation of an offset LO generator. The circuit **240** comprises a synthesizer **244**, frequency dividers **246**, **252**, XOR gates **254**, **256** and band pass filters **262**, **264**.

In operation, a reference signal  $f_{REF}$  **242** generated by a crystal oscillator is input to a synthesizer **244** tuned to exactly  $\frac{1}{3}f_{REF}$ . The output of the synthesizer is divided by two via divider **246** to generate a quadrature pair clocks (quadrature **248** and in-phase **250**) at  $\frac{2}{3}f_{REF}$ . The in-phase signal **250** is further divided via divider **252** into another quadrature pair (quadrature **261** and in-phase **263**) at  $\frac{1}{3}f_{REF}$ . The quadrature signal **248** is XORed with the quadrature divided signal **261** via XOR circuit **254** to generate an in-phase unfiltered LO signal **258** having spectral spurs every  $f_{RF}/2$ . The in-phase signal **263** is mixed with the quadrature divided signal **248** via XOR circuit **256** to yield the unfiltered LO quadrature signal **260**. Quadrature pair **258**, **260** undergo band pass filtering via filters **262**, **264** to yield the output local oscillator signals  $LO_I$  ( $f_{LOI}$ ) **266**,  $LO_Q$  ( $f_{LOQ}$ ) **268**, respectively.

A timing diagram illustrating the various digital traces for the first embodiment local oscillator generation mechanism of the present invention of FIG. **8** is shown in FIG. **9**. Signal I (trace **270**) shows the first divider **246** in-phase signal **250**, while signal Q (trace **272**) shows the first divider **246** quadra-

ture signal **248**. These signals have a **90** degree phase shift relationship to each other. Signal II (trace **274**) shows the in-phase signal **263** output of the second divider **252**, while signal IQ (trace **276**) shows the second divider **252** quadrature output **261**. Signals I<sub>F<sub>c</sub></sub> (trace **278**) and Q<sub>F<sub>c</sub></sub> (trace **280**) show the time behavior of the in-phase and quadrature unfiltered LO signals **258** and **260**, respectively. From the timing diagram, it is evident that these signals are not spectrally pure sine waves but have a binary pattern of 10110100, sampled at  $\frac{3}{8}T$ , where  $T=1/f_{RF}$ .

A graph illustrating the spectrum magnitude plot of the output of the circuit of FIG. **8** is shown in FIG. **10**. In particular, the spectrum shows a power spectrum magnitude plot of signal traces **278** or **280**. The plot comprises the fundamental or desired frequency product at  $f_{RF}$  (peak **292**) as well as undesired products at  $((1+2n)/3)f_{RF}$ , where n is an integer (i.e. peaks **290**, **294**, **296**, **298**). The magnitude of the undesired harmonic **290** at  $\frac{1}{3}f_{RF}$  is approximately  $-7$  dB, while its counterpart at  $\frac{5}{3}f_{RF}$  is about  $-5$  dB. The magnitude of the unwanted peaks, creates the need for stringent requirements on BPFs **262**, **264**.

The basic ADPLL structure (FIG. **7**) runs at approximately 3.2 GHz ( $\frac{4}{3}$  times the desired frequency  $f_{LO}$ ). As described supra, the LO frequency is divided by two to obtain in phase and quadrature square waves at  $\frac{2}{3}f_{LO}$  and subsequently divided down again to obtain in-phase and quadrature square waves at  $\frac{1}{3}f_{LO}$ . A logical type "mixing" operation is then applied using the following equations:

$$I = NXOR(Q, IQ)$$

$$Q = NXOR(II, Q)$$

where

$$nxor(A, B) = AB \text{ or } \overline{AB}$$

$\overline{A}$  being the logical NOT of A;

Note that the logical combining operation may comprise either NXOR or XOR yielding either the signal or its inverse polarity (i.e. 180 degree) signal. In electrical terms, this means that all the operations from the ADPLL up to the band pass filters are carried out by high speed analog circuits, while the band pass filters are analog in nature followed by a slicer (inverting or non-inverting).

A mathematical derivation for the first embodiment will now be presented. In the case of no mismatch, writing the Fourier series for the I signal, we obtain:

$$I_1 = \frac{2j}{\pi} \sum_{\substack{n=-\infty \\ n \text{ odd}}}^{\infty} \frac{1}{n} e^{j2\pi n f t}$$

where

f denotes the square wave frequency after the first divider;  
 t denotes time;  
 j denotes  $\sqrt{-1}$ ;  
 Similar results can be obtained for Q, II and IQ.

$$Q = \frac{2j}{\pi} \sum_{\substack{n=-\infty \\ n \text{ odd}}}^{\infty} \frac{1}{n} e^{j2\pi n (f t - \frac{1}{4})}$$

-continued

$$II = \frac{2j}{\pi} \sum_{\substack{n=-\infty \\ n \text{ odd}}}^{\infty} \frac{1}{n} e^{j2\pi \frac{f}{2} t}$$

$$IQ = \frac{2j}{\pi} \sum_{\substack{n=-\infty \\ n \text{ odd}}}^{\infty} \frac{1}{n} e^{j2\pi n (\frac{f}{2} t - \frac{1}{4})}$$

The NXOR operation is equivalent to time domain multiplication and therefore the LO<sub>I</sub> and LO<sub>Q</sub> signals can be expressed as:

$$LO_I = Q \cdot IQ = \frac{-4}{\pi^2} \sum_{\substack{n, m=-\infty \\ n, m \text{ odd}}}^{\infty} \frac{1}{nm} e^{j2\pi ((n+\frac{m}{2})f t - \frac{1}{4}(n+m))}$$

$$LO_Q = II \cdot Q = \frac{-4}{\pi^2} \sum_{\substack{n, m=-\infty \\ n, m \text{ odd}}}^{\infty} \frac{1}{nm} e^{j2\pi ((\frac{n}{2}+m)f t - \frac{1}{4}m)}$$

For each frequency product of interest (F), the appropriate m, n pairs can be found which satisfy the correct frequency conditions in Equations 12 and 13. Note, however, that the frequency products yielding  $F=kf$  (for integer 'k's) are not generated.

Second Embodiment

Non-Harmonic DCO With XOR and Jitter Compensation #1

A block diagram illustrating a second embodiment of the local oscillator generation mechanism of the present invention is shown in FIG. **11**. The circuit, generally referenced **300**, comprises a synthesizer **304**, T/4 delay **306**, frequency divider **308**, XOR gate **314**,  $\pm T/12$  delay **318** and control unit **320**.

In operation, a reference signal  $f_{REF}$  **302** is input to a synthesizer tuned to exactly  $\frac{2}{3}f_{RF}$ . Alternatively, the  $\frac{4}{3}f_{RF}$  configuration with a quadrature divider generating 90-degree spaced clocks could be used. In this case, the T/4 delay would not be needed. The digital output of the synthesizer is input to a T/4 delay **306** and a divide by two circuit **308**. The outputs of both blocks are XORed together via XOR circuit **314**. The output of the XOR circuit is input to a programmable  $\pm T/12$  delay **318**. Since the absolute delay of block **318** does not change the overall structure, a "negative delay" can be achieved using two paths whose relative delay difference is  $2 * T/12 = T/6$ .

The  $\pm T/12$  delay block is controlled by control unit (CU) **320** which selects the delay that should be taken based on the X1 **324** and X2 **326** input ports. The control unit logic may be implemented in any suitable manner to yield the desired waveform. For example, the control unit may comprise a state machine appropriately programmed (known to one skilled in the art) such that on rising edges of X1 the delay is set to  $+T/12$ , while on falling edges, the delay is set to  $-T/12$ . Thus, the control unit determines which way the output LO clock **322** is pulled. Rising edges of X1, the output LO clock is pulled forward, while falling edges pull the output LO clock back.

A timing diagram illustrating the various time domain traces for the second embodiment local oscillator generation

mechanism of the present invention of FIG. 11 is shown in FIG. 12. Trace 330 represents the X1 signal 324 while trace 332 represents the X2 signal 326. The result of the XORing of the X1 and X2 signals is represented by trace 334. The arrows in this trace indicate the direction of the delay required on the XOR signal 316 in order to create a perfect square wave clock (shown as trace 336). Arrows heading to the right indicate a positive delay while arrows leading to the left indicate a negative delay, wherein negative delays are implemented by manipulating the relative delay difference as described supra.

Note that the relationship between 334 and 336 exhibits momentary "negative delays", but it is well understood to one skilled in the art that if trace 334 was moved forward by  $2 \cdot T/12 = T/6$ , then the relative delays would be either 0 or  $T/12$ , thus establishing causality for the system. Please note that if the delays are perfectly  $T/12$  then the generated signal has zero undesirable products.

#### Third Embodiment

##### Non-Harmonic DCO With XOR and Jitter Compensation #2

A block diagram illustrating a third embodiment of the local oscillator generation mechanism of the present invention is shown in FIG. 13. The circuit, generally referenced 340, is a second implementation of the local oscillator generation scheme of FIG. 11. The circuit 340 comprises a synthesizer 344, T/4 delay 348, frequency divider 350,  $-T/12$  delay circuit 353,  $T/12$  delay circuit 354, multiplexer 358 and control unit (CU) 360.

In operation, a reference signal 342 is input to a synthesizer 344 tuned to exactly  $\frac{2}{3}f_{RF}$ . The digital signal 346 output of the synthesizer is input to both a T/4 delay circuit 348 as well as divide by two circuit 350, which are operative to generate signals X1 362 and X2 364, respectively. Note that here too, as described before, the T/4 delay circuit 348 is not needed if a quadrature generation of the 346 signal is available. Signal X1 undergoes delays of  $-T/12$  via delay circuit 352 and  $+T/12$  via delay circuit 354. The outputs of the delay circuits 353, 354 and signal X2 are input to a multiplexer 358 whose select control input is generated by the control unit 360, which may be implemented as a state machine or any other suitable processing or computing element. The inputs to the control unit comprise the signals X1 and X2. It is appreciated that one skilled in the electrical arts can program the control unit such that the multiplexer outputs a perfect clock signal in similar fashion to the circuit of FIG. 11.

Note that the implementations of both FIGS. 11 and 13 utilize asynchronous delays that can be implemented in deep-submicron processes using pre-calibrated inverter chains.

Note further that the pulling of edges of signal 334 in FIG. 12 in the time domain is equivalent to reducing the unwanted harmonics in the frequency domain. The non-perfect  $\pm T/12$  timing adjustments result in non-zero spurious energy of the harmonics. The amount of harmonic reduction is proportional to how close the timing delay is achieved. With a reasonable amount of inaccuracy, however, a substantial reduction could be achieved. This method could be combined with the use of band pass filtering, which in this embodiment would require less stringent filtering specifications.

#### Fourth Embodiment

##### LO Generation Circuit #1

A block diagram illustrating a fourth embodiment of the local oscillator generation mechanism of the present inven-

tion is shown in FIG. 14. The circuit, generally referenced 370, comprises a synthesizer 374, frequency dividers 376, digital logical mixing blocks 380, 382, weights 386, 390, summers 392, 394 and band pass filters 400, 402.

In operation, a frequency reference signal  $f_{REF}$  372 is input to the synthesizer 374 timed to a rational multiplier of the RF frequency  $f_{RF}$ . This signal is divided down via frequency dividers circuit 376. Please note that circuit 376 typically comprises several dividers and its outputs may be the result of multiple, sometime cascaded, division operations. The output of the frequency dividers is a plurality of phases 378 at various division ratios of the divided signal and stages within the division. For example, considering a division ratio of four, the divider can be implemented as a cascade of two divide by two circuits where the outputs are the in-phase and quadrature of the first divider, the in-phase and quadrature of a second divider operating on the in-phase of the first divider and the in-phase and quadrature signals of a second divider operating on the quadrature signal of the first divider.

The divided signals and phases 378 undergo processing by digital logical mixing block 1 380 which is operative to generate a plurality of combination signals 384 (M in total). Note that digital logical mixing block 1 may comprise either combinatory logic (represented by a truth-table), a finite state machine (FSM) or a combination thereof. The plurality of signals 384 output of digital logical mixing 1 undergo multiplication by a set of weights  $w_0 \dots w_M$  386 followed by summation via adder 392 to yield in-phase signal 396.

Note that the circuit 370 comprises a semi-analog operation and can be implemented in numerous ways, as is appreciated by one skilled in the electrical arts. Examples of implementation of this circuit include (1) summation of current sources onto a load using binary or thermometer weighted CMOS transistors; and (2) using resistor or capacitor value ratios to sum voltages or currents.

A quadrature signal can be generated using optional block 404. Digital logical mixing block 2 382 outputs a different plurality of combination signals 388 (L in total) which is multiplied by a different set of weights  $w'_0 \dots w'_L$  390 and summed via adder 394 to yield quadrature signal 398.

Finally, the summed values output of adders 392, 394 are filtered via BPF filters 400, 402 to yield the output  $LO_I (F_{LOI})$  406,  $LO_Q (f_{LOQ})$  408 signals, respectively. The summing operation effectively cancels out or significantly attenuates some of the undesired products to create a signal which is significantly easier to filter than that obtained using conventional mixing. A key benefit of this fourth embodiment of the present invention is that by operating the local oscillator at a rational multiplier of the RF frequency, the undesirable sidebands are kept low which eases or completely obviates any required filtering.

#### Fifth Embodiment

##### LO Generation Circuit #2

A block diagram illustrating a fifth embodiment of the local oscillator generation mechanism of the present invention is shown in FIG. 15. This fifth embodiment is an example implementation of the LO generation circuit (fourth embodiment) of FIG. 14. The circuit, generally referenced 410, comprises frequency dividers 417, digital logical mixing 419 and weighting 421 blocks. The frequency dividers 417 block, coupled to synthesizer 412, comprises cascaded frequency dividers 414, 420, 426 and inverters 416, 429. The digital logical mixing block 419 comprises XOR gates 434, 438,

442. The weighting 421 block, coupled to band pass filter 454, comprises multipliers 446, 448, 450 and adder 452.

In operation, frequency reference signal  $f_{REF}$  411 is input to the frequency synthesizer 412 running at  $4/3f_{RF}$ . The output of the synthesizer is divided by two via divider circuit 414 which outputs a quadrature pair I 418 and Q 422. The in-phase signal I 418 is divided again by divider circuit 420 into in-phase signal II 430 and a quadrature signal IQ. The quadrature signal Q 422 undergoes division by two via block 426 to yield a quadrature set QI 432 and QQ 428. Signal I 418 is also negated via inverter (i.e. not) circuit 416 to yield signal  $\sim$ I 435. Similarly, signal QQ 428 is negated via inverter (i.e. not) circuit 429 to yield signal  $\sim$ QQ 431.

XOR circuit 434 is operative to XOR signals I with signal  $\sim$ QQ to yield signal 436. XOR circuit 438 is operative to XOR signals II and Q to yield signal 440. XOR circuit 442 is operative to XOR signals  $\sim$ I and QI to yield signal 444. Signals 436, 440, 444 are multiplied by constant weights of 5, 7, 5, respectively. The weighted output signals are summed via adder 452. This summed signal undergoes filtering via BPF filter circuit 454. Note that the weights may be applied, for example, using analog multipliers, DPA circuits, op amps or any other suitable technique. Further, the filter alone is not sufficient to filter out the  $1/3f_{RF}$  signal, as greater than 90 dB attenuation is required for some applications (e.g., Bluetooth in a cellular phone), which is very difficult to achieve. The action of the weights and summer effectively cancel the  $1/3f_{RF}$  component and amplifies the  $f_{RF}$  component.

To aid in illustrating the principles of operation of this fifth embodiment, a phasor diagram illustrating the relationship between the products generated in the LO generation circuit of FIG. 15 is shown in FIG. 16. The phasor diagram shows the three generated signals. The vector arrows represent phasors of the generated signals in both the fundamental at  $f$ , as well as the first undesired product (i.e. sub-harmonic) at  $f_{RF}/3$ . Phasor 468 represents signal 436 at  $f_{RF}/3$  ( $3/4\pi$  rotated product); phasor 470 represents signal 444 at  $f_{RF}/3$ ; phasor 466 represents signal 440 at  $f_{RF}/3$ ; phasor 460 represents the  $3/4\pi$  rotated fundamental; phasor 462 represents the  $f_{RF}$  component of signal 440; and phasor 472 represents the sum of phasors 468 and 470 (i.e. the sum of  $3/4\pi$  and  $-3/4\pi$  product rotations).

It is important to note that any phase difference  $\Delta\theta$  between two signals at  $f_{RF}/3$  yields a phase difference of  $3\Delta\theta$  at  $f_{RF}$ . The radius of the inner circle 471 represents the magnitude of the  $f_{RF}/3$  components while the radius of the outer circle 473 radius represents the magnitude of the  $f_{RF}$  component. Without limiting generality, the phasors of signal 440 (i.e.  $\times 7$  weight) are placed on the x axis. Hence phasor 466 is the  $f_{RF}/3$  component of signal 440 (i.e. the main signal), while phasor 462 is the  $f_{RF}$  component thereof.

The two auxiliary signals 436 and 444 have  $f_{RF}/3$  components rotated by  $3/4\pi$  and  $-3/4\pi$  (i.e. 468 and 470, respectively) with respect to the main signal. Therefore, their  $f_{RF}$  counterparts are rotated by  $3/4\pi$  and  $-3/4\pi$  (phasors 460 and 464), respectively, with respect to the main signal component at  $f_{RF}$ . Summing phasors 468 and 470, which have a  $\pi/2$  phase difference between them, yields a vector with a magnitude of  $\sqrt{2}$  larger than each one and the main signal component at  $f_{RF}/3$  466 with an angle of  $\pi$  with respect to it. Hence, the main signal should be multiplied by  $\sqrt{2}$  (or each auxiliary signal by  $1/\sqrt{2}$ ) in order to achieve perfect cancellation at  $f_{RF}/3$ . Alternatively, the main signal is multiplied by 7 and each one of the auxiliary signals by 5. Since  $7/5 \approx \sqrt{2}$  to about 1% of accuracy a very reasonable cancellation is achieved.

The cancellation can be calculated as follows:

$$20 \log_{10} (5\sqrt{2} - 7) \approx -23 \text{ dB} \quad (14)$$

Using this rational approximation makes the implementation simpler due to the ability to use thermometric weighted current sources or CMOS transistors. At the fundamental frequency  $f_{RF}$ , the auxiliary signal components add to the main signal component to create an even larger component. Since each one of the phasors 460 and 464 have a  $\pi/4$  angle with phasor 462 and they are equal in magnitude, their sum is collinear with phasor 462 and has a magnitude of  $(7+5\sqrt{2})=23$  dB larger than the original size of phasor 462. The net cancellation (increase in fundamental at  $f_{RF}$  combined with component attenuation at  $f_{RF}/3$ ) is  $23+23=46$  dB. Adding this to the original 5 dB difference between the fundamental and the component at  $f_{RF}/3$ , we obtain a 51 dB total difference. Depending on the implementation, this may require additional light attenuation or may be sufficient and the filter 454 (FIG. 15) can be replaced with a low pass filter, which is easier and less costly to implement.

A timing diagram illustrating the various time domain traces for the fifth embodiment local oscillator generation mechanism of the present invention shown in FIG. 15 is shown in FIG. 17. The timing diagram shows the time domain traces for the various signals in the circuit 410 of FIG. 15. Traces 474, 476, 478, 480, 482, 484 represent signals I, Q, II, QI, IQ, QQ, respectively. Trace 486 shows the main signal at weight 448, trace 488 shows the auxiliary signal at weight 446 and trace 490 shows the auxiliary signal at weight 450. Finally, trace 492 shows the sum of all weighted contributions (i.e. output of adder 452), which after filtering is the desired  $f_{LO}$  output clock.

A graph illustrating the spectrum magnitude plot of the output of the circuit of FIG. 15 is shown in FIG. 18. In particular, the spectrum magnitude plot shows the power spectral magnitude of trace 492. Component 500 at  $f_{RF}/3$  has roughly a 50 dB attenuation with respect to the fundamental (i.e. desired) component 502 at  $f_{RF}$ . The next undesired component is at  $5/3f_{RF}$  and is relatively easy to filter since it is almost an entire octave away from the fundamental component. There are additional undesirable components 506, 508, 510 at  $7/3f_{RF}$ ,  $3f_{RF}$ ,  $11/3f_{RF}$ , respectively. Thus, since the first undesired component 500 has an approximate 50 dB attenuation, the relatively expensive band pass filter 454 (FIG. 15) can be replaced with a lower cost low pass filter.

## Sixth Embodiment

### LO Generation Circuit with Pulse Generation #1

A block diagram illustrating a sixth embodiment of the local oscillator generation mechanism of the present invention is shown in FIG. 19. The circuit, generally referenced 520, comprises a frequency synthesizer 524, frequency dividers 528, 548, pulse generator 532, selector block 536, control unit 544 and optional filter 540.

In operation, a frequency reference signal  $f_{REF}$  522 is input to the frequency synthesizer 524 operating at a rational multiplier of the RF frequency  $f_{RF}$ . The synthesizer generates a clock signal 526 at  $L/N f_{RF}$ , where L and N are integer numbers. The clock signal 526 is then divided by a factor of Q via divider circuit 528 to form exactly 2Q phases 530 of the clock at a frequency of  $L/(N*Q) f_{RF}$ . Each phase then undergoes division by L using divider circuits 548. The 2Q phase signals 530 are also input to pulse generator circuit(s) 532 which may comprise digital combinatory logic circuitry or

asynchronous circuitry such as a mono-stable. The output of the pulse generator comprises a plurality of pulse signals **534** which are input to a selector block **536**. The selector block functions to select which signal out of the plurality of pulse signals **534** to output as signal **538** at any point in time. The selector circuit may be implemented in any suitable manner such as a multiplexer, combinatory logic or a finite state machine (FSM).

A control unit (CU) **544** functions to receive both the output of the selector **538** as well as the output of dividers **548**. Based on the inputs, the control unit outputs a select signal **546** which indicates to the selector **536** which of the pulses **534** to output at any given moment. The resultant signal **538** is the local oscillator clock signal which is generated in TDM fashion from the plurality of pulses **534**. An optional filter **540** eliminates any undesired frequency spurs. Note that in the case of  $N=2$ , there are sufficient grid points to generate a fully periodic signal without any frequency spurs. Implementation imperfections, however, may generate spurious tones which may require filtering to limit the spurious spectrum of the output signal  $f_{LO}$ .

#### Seventh Embodiment

##### LO Generation Circuit with Pulse Generation #2

A block diagram illustrating a seventh embodiment of the local oscillator generation mechanism of the present invention is shown in FIG. 20. The circuit, generally referenced **550**, comprises frequency synthesizer **552**, frequency dividers **556**, **586**, **588**, **590**, **592**, gates **562**, **566**, **570**, **574**, **602**, **604**, **606**, **608**, **610** and optional filter **614**.

In operation, a frequency reference signal  $f_{REF}$  **551** is input to the frequency synthesizer **552** tuned to exactly  $\frac{3}{2}f_{RF}$ . The output **554** of the synthesizer is input to a divide by two circuit **556** which produces four phases of the input signal at an exact frequency of  $\frac{3}{4}f_{RF}$ . The four phases are denoted by their quadrature names and inverses, namely signal I **578**, signal Q **580**, signal  $\sim I$  (i.e. not I) **582** and signal  $\sim Q$  (i.e. not Q) **584**. These four signals are input to the pulse generator circuit **560** which comprises four AND gates **562**, **566**, **570**, **574**. The four AND gates perform a logical AND operation between each possible pair of contiguous phases. In particular, AND gate **562** performs its operation between the I and Q signals to generate I&Q (i.e. I and Q) signal **564**. AND gate **566** performs its operation between the I and  $\sim Q$  signals to generate I& $\sim Q$  (I AND NOT(Q)) signal **568**. AND gate **570** performs its operation between the  $\sim I$  and  $\sim Q$  signals to generate  $\sim I$ & $\sim Q$  (NOT(I) AND NOT(Q)) signal **572**. AND gate **574** performs its operation between  $\sim I$  and Q signals to generate  $\sim I$ &Q (NOT(I) and Q) signal **576**. The four pulse output signals **564**, **568**, **572**, **576** are input to the combined selector/control unit block **616**.

The four phase signals output of the divide by two circuit **556** also undergo division by three. Divide by three circuit **586** divides the  $\sim Q$  signal **584** to generate  $\sim Q/3$  signal **594** (NOT(Q) divided by three). Divide by three circuit **588** divides the  $\sim I$  signal **582** to generate  $\sim I/3$  signal **596** (NOT(I) divided by three). Divide by three circuit **590** divides the Q signal **580** to produce  $Q/3$  signal **598** (Q divided by three). Divide by three circuit **592** divides the I signal **578** to generate  $I/3$  signal **600** (I divided by three).

Combined selector and control unit **616** comprises four AND gates **602**, **604**, **606**, **608**, which AND the four divide by three output signals with their respective pulse signals. The respective results are wire-ORed together by OR circuit **610**. The effective operation of the selector/control unit is to use

the divide by three outputs **594**, **596**, **598**, **600** as "one-hot" controls to select which pulse out of the four pulses (**564**, **568**, **572**, **576**) will be output by the block. Note that in digital circuits, the term one-hot refers to a group of bits among which the legal combinations of values are only those with a single high ("1") bit and all the others low ("0").

Note also that this circuit preferably has an output with no sub-harmonics (lowest spectral tone being at  $f_{RF}$ ), which permits much simpler filtering. An optional filter **614** can be used to attenuate any unwanted frequency spurs.

A timing diagram illustrating the various time domain traces for the sixth embodiment local oscillator generation mechanism of the present invention of FIG. 20 is shown in FIG. 21. Trace **620** represents the output  $\sim Q/3$  **594**, trace **622** represents the output  $\sim I/3$  **596**, trace **624** represents the output  $Q/3$  **598** and trace **626** represents the output  $I/3$  **600**. As can be seen from the timing diagram, the outputs of the dividers provide wide signals which can be used to gate the pulses in order to produce a perfect pulse train. Although this is not a perfect "one-hot" scheme where only one of these wide pulses can be active at any time, the situation where this might impede with the normal circuit operation is limited to the case of a pulse occurring in the overlap of two of the divider signals which is prevented by this circuit. Traces **628** and **630** represent the Q and I outputs, respectively. Trace **632** shows the output of AND gate **608**. As can be seen, the narrow pulses generated by the pulse generation circuit are gated by the wide gate signals (signal **626**  $I/3$  in this case) to produce one of the pulse phases ORed together to produce the  $f_{LO}$  output clock signal **612** (FIG. 20) represented by trace **634**.

A graph illustrating the spectrum magnitude plot of the output of the circuit of FIG. 20 is shown in FIG. 22. The spectrum magnitude plot is of the FIG. 12b shows a spectral plot of the  $f_{LO}$  output clock signal **612** (trace **634**). As can be seen, the lowest frequency tone **640** is produced at  $f_{RF}$ . Undesired tones **642** and **644** appear at the even harmonics  $2f_{RF}$  and  $4f_{RF}$ , respectively.

#### Eighth Embodiment

##### LO Generation Circuit with Pulse Generation #3

A block diagram illustrating an eighth embodiment of the local oscillator generation mechanism of the present invention is shown in FIG. 23. The circuit, generally referenced **650**, is a second example embodiment of the sixth embodiment of FIG. 19. The circuit **650** comprises frequency synthesizer **652**, frequency divider **654**, multiplexer **664**, counter **668** and optional filter **672**.

In operation, a frequency reference signal  $f_{REF}$  **651** is input to the frequency synthesizer **652** running at  $\frac{3}{2}f_{RF}$ . The signal frequency output of the synthesizer is divided by two via divider circuit **654** which has four phase outputs, namely, the quadrature pair I and Q (**656** and **658**, respectively) and their inverses  $\sim I$  and  $\sim Q$  (**660** and **662**, respectively). The four phases are input to a multiplexer **664** which functions to output the desired local oscillator signal. The control unit in this embodiment which controls the multiplexer selection comprises a modulo-4 counter **668**. The counter is clocked by the local oscillator output signal **670** and the output **666** is input to the selecting input of the multiplexer. In this embodiment, the selector circuit is implemented as the multiplexer **664** while the control unit is implemented as a modulo-4 counter **668**. An optional filter **672** removes any unwanted frequency spurs.

It is noted that, in an alternative embodiment, the selecting input **666** is advantageously driven by one of the four phases

of the output of divider **654**. Driving a multiplexer selecting input by a signal that does not depend on the multiplexer output can be considered beneficial as it provides for more reliable operation.

A timing diagram illustrating the various time domain traces for the eighth embodiment local oscillator generation mechanism of the present invention of FIG. **23** is shown in FIG. **24**. The timing diagram shows the various time domain traces for the signals of the circuit **650** of FIG. **23**. Traces **680**, **682**, **684** and **686** represent the four phases (i.e.  $\sim Q$ ,  $\sim I$ ,  $Q$  and  $I$ ), respectively. The thick lines in the traces represent the portions which are multiplexed to the output via multiplexer **664**. Trace **688** represents the output of the counter **668**. Trace **689** represents the output waveform  $f_{LO}$  **674**. As can be seen, notwithstanding a duty cycle aberration, the output waveform is a perfect signal at  $f_{RF}$ .

A graph illustrating the spectrum magnitude plot of the output of the circuit of FIG. **23** is shown in FIG. **25**. It is evident from the plot that the circuit does not generate a component at  $f_{RF}/3$  and the largest frequency component **690** is at  $f_{RF}$ . In addition, even harmonics exist as undesired signals **692**, **694** at  $2 f_{RF}$ ,  $3 f_{RF}$ , etc. It is noted that the output local oscillator clock signal does not require filtering. Lower frequency components, however, may be created by timing mismatches at the multiplexer input. These unwanted frequency spurs can be minimized using careful analog design and layout techniques.

#### Ninth Embodiment

##### Non-Integer Local Oscillator Using Spectral Replicas

The ninth embodiment is described in the context of an example wireless link using non-integer LO incorporating a Cartesian DPA. A more detailed description of the operation of the DPA in the Cartesian transmitter can be found in U.S. Patent Publication No. 2006/0038710A1, cited supra.

The wireless link device may comprise any suitable device such as a multimedia player, mobile device, cellular phone, PDA, etc. For illustration purposes, the wireless link comprises a WLAN embedded in a mobile transmission and reception link. Note that this example is not intended to limit the scope of the invention as the Cartesian based replicas non-integer LO mechanism of the present invention can be implemented in a wide variety of communication devices.

The ninth embodiment utilizes spectral replicas generated when incorporating a zero order hold effect of the Digital Power Amplifier (DPA) during the modulation of a wideband signal. The sampling rate of the DPA is specifically configured such that one of the replicas falls directly in the desired in-band frequency. All other replicas are filtered using analog or digital filtering. The other replicas are set to fall into specific frequency bands that do not cause any interference to other radios. This allows the requirements of the analog filtering at the last stage to be significantly relaxed and thus simpler and less costly to implement.

A block diagram illustrating a ninth embodiment of the local oscillator generation mechanism of the present invention incorporating the Cartesian based non-integer local oscillator is shown in FIG. **26**. The example transmitter circuit, generally referenced **700**, comprises interpolators/up-samplers **702**, **704**, quadrature mixer **706**, local oscillator **708**, DPA circuits **710**, **712**, adder **714**, band pass filter **716** and amplifier **718**.

The transmitter **700** incorporates the Cartesian based dual DPA non-integer local oscillator of the present invention. In

operation, the I and Q complex input baseband signal  $S_{BB}(n)$  is upsampled and interpolated via blocks **702** and **704**, respectively. The output of the interpolators are then upconverted in the digital domain using complex multiplier **706** resulting in a signal  $I_{IF}(n)+jQ_{IF}(n)$  centered at IF. The IF frequency is adjusted to be half the LO's frequency so as to fit in the upconversion of the next stage.

The LO **708** is tuned to operate at a frequency which is a non integer ratio N/M of the LO to RF. Note that in the case of a Bluetooth or WLAN signal this ratio could be set to  $3/2$  division of the target RF frequency  $f_{RF}$ . The IF frequency is set to be half of the LO frequency so that the sampling rate of the last digital stage is equal to the LO frequency. The digital IF signal is then converted to the analog domain using two DPA circuits **710** and **712** for I and Q branches, respectively. The DPA circuits function to create two analog signals for the in-phase I and quadrature Q signals wherein the resulting signals include multiple replicas of the signals at  $f_{IF}$ ,  $f_{IF}+f_{LO}$ ,  $f_{IF}+2f_{LO}$ , etc., due to the ZOH nature of the DPA circuits.

The resultant I and Q analog signals are then combined via adder **714** (e.g., voltage or current combiner). The output of the adder is then filtered using BPF **716** to extract the desired replica. The frequency of the replica is selected so that it does not fall in any cellular band. Attenuation is required only if the level of the replicas is above any requirement or standard (e.g., FCC, etc.). The filtered signal may be amplified by a power amplifier (PA) **718** that may be embedded on or off the radio integrated circuit chip.

A simplified block diagram illustrating the DPA of the local oscillator generation circuit of FIG. **26** in more detail is shown in FIG. **27**. The DPA circuit, generally referenced **720**, comprises a plurality of gates **722** and transistors **724**, and an RF inductor portion of the load **726**. In operation, the clock signal is gated with a control word (inputs  $D_1$  through  $D_N$ ). The value of the control word at any instant in time determines the amplitude of the signal output of the DPA. The clock signal (i.e. LO output) input to the DPA also functions as its sampling frequency. Therefore, the spectrum at the output of the complex multiplier is repeated every sampling frequency  $f_s$ . Thus, an analog mixer is not required for further upconversion since the first replica of the DPA output can be used instead. The replicas generated by the ZOH effect of the DPA are repeated every sampling frequency (i.e. the LO frequency). Since the complex IF signal is located at the  $f_{LO}/2$  than the first replica will be located at  $f_{LO}+f_{LO}/2$ .

As an example, consider a Bluetooth transmission. In this Bluetooth example, the RF frequency  $f_{RF}$  is tuned to 2402 MHz (i.e. the first Bluetooth channel). The local oscillator frequency is therefore tuned to  $f_{LO}=f_{RF}/3=1601.33$  MHz. In this case, the DPA also creates a very strong replica (only 13 dB less than the "main replica") positioned at  $f_{RF}=f_{LO}+f_{IF}=f_{LO}+f_{LO}/2=(3/2)*f_{LO}=(3/2)*1601.33=2402$  MHz.

A graph illustrating simulation results of the spectrum at the output of the transmitter employing the Cartesian based non-integer local oscillator of FIG. **26** is shown in FIG. **28**. Note that the 2402 MHz peak shown is obtained as a result of filtering the first replica.

The ninth embodiment thus provides an efficient method to implement the local oscillator and to generate the required clock signal. The method uses a complex multiplier intended to shift the zero baseband signal such that it is centered on  $f_{LO}/2$  (e.g.,  $1601.33/2=800.6$  MHz). Subsequent processing by the two DPA circuits generates outputs which are easily combined using a voltage or current combiner. The two DPA circuits and combiner could further be simplified by connecting the drain junction of each of the DPAs to the same induc-

tor used to pump the current during the transitions of the DPA thereby reducing the complexity of the combiner.

It is intended that the appended claims cover all such features and advantages of the invention that fall within the spirit and scope of the present invention. As numerous modifications and changes will readily occur to those skilled in the art, it is intended that the invention not be limited to the limited number of embodiments described herein. Accordingly, it will be appreciated that all suitable variations, modifications and equivalents may be resorted to, falling within the spirit and scope of the present invention.

What is claimed is:

1. An apparatus for generating a local oscillator signal having an output frequency, comprising:
  - an oscillator circuit operative to generate a first signal at a first frequency;
  - a delay circuit coupled to said oscillator circuit and operative to delay said first signal by substantially one-quarter period to generate a second signal therefrom;
  - a divider coupled to said oscillator circuit and operative to divide said first signal to generate a third signal therefrom at a second frequency;
  - an XOR circuit operative to XOR said second signal and said third signal to generate a fourth signal therefrom; and
  - means for dynamically adjusting the edges of said fourth signal in accordance with the state of said second signal and said third signal to generate an output signal having an average frequency substantially equal to said output frequency.
2. The apparatus according to claim 1, wherein said fourth signal is adjusted by plus one-twelve period on the rising edge of said second signal.
3. The apparatus according to claim 1, wherein said fourth signal is adjusted by minus one-twelve period on the falling edge of said second signal.
4. The apparatus according to claim 1, wherein said first frequency is substantially equal to four-thirds of said output frequency.
5. The apparatus according to claim 1, wherein said second frequency is substantially equal to two-thirds of said output frequency.
6. An apparatus for generating a local oscillator signal having an output frequency, comprising:
  - an oscillator circuit operative to generate a first signal and a second delayed signal at a first frequency;
  - a divider coupled to said oscillator circuit and operative to divide said first signal to generate a third signal therefrom at a second frequency;
  - means for logically mixing said second signal and said third signal to generate a fourth signal therefrom; and
  - means for dynamically adjusting the edges of said fourth signal to generate an output signal having an average frequency substantially equal to said output frequency.
7. The apparatus according to claim 6, further comprising a filter coupled to receive said output signal and operative to attenuate unwanted products to yield a filtered output signal therefrom.
8. The apparatus according to claim 6, wherein said fourth signal is adjusted by plus one-twelve period on the rising edge of said second signal.
9. The apparatus according to claim 6, wherein said fourth signal is adjusted by minus one-twelve period on the falling edge of said second signal.
10. The apparatus according to claim 6, wherein said first frequency is substantially equal to four-thirds of said output frequency.

11. The apparatus according to claim 6, wherein said second frequency is substantially equal to two-thirds of said output frequency.

12. An apparatus for generating a local oscillator signal having an output frequency, comprising:
 

- an oscillator circuit operative to generate a first signal at a first frequency;
- a first delay circuit coupled to said oscillator circuit and operative to delay said first signal by substantially one-quarter period to generate a second signal therefrom;
- a divider coupled to said oscillator circuit and operative to divide said first signal to generate a third signal therefrom at a second frequency;
- a second delay circuit operative to delay said second signal to generate a fourth signal therefrom;
- a third delay circuit operative to delay said second signal to generate a fifth signal therefrom; and
- a multiplexer operative to select one of said third signal, said fourth signal and said fifth signal as an output signal having an average frequency substantially equal to said output frequency in accordance with the state of said second signal and said third signal.

13. The apparatus according to claim 12, wherein said second delay circuit is operative to delay said second signal by minus one-twelve period.

14. The apparatus according to claim 12, wherein said third delay circuit is operative to delay said second signal by plus one-twelve period.

15. The apparatus according to claim 12, wherein said multiplexer is operative to effectively adjust said output signal by plus one-twelve period in response to a rising edge of said second signal.

16. The apparatus according to claim 12, wherein said multiplexer is operative to effectively adjust said output signal by minus one-twelve period in response to a falling edge of said second signal.

17. The apparatus according to claim 12, wherein said first frequency is substantially equal to four-thirds of said output frequency.

18. The apparatus according to claim 12, wherein said second frequency is substantially equal to two-thirds of said output frequency.

19. A method of generating a local oscillator signal having an output frequency, said method comprising the steps of:
 

- first generating a first signal at a first frequency;
- second generating a second signal delayed from said first signal;
- dividing said first signal to generate a third signal therefrom at a second frequency;
- logically XORing said second signal and said third signal to generate a fourth signal therefrom; and
- dynamically adjusting edges of said fourth signal in accordance with the state of said second signal and said third signal to generate an output signal having a frequency substantially equal to said output frequency.

20. The method according to claim 19, wherein said step of second generating comprises delaying said first signal by one-quarter period.

21. The method according to claim 19, wherein the average frequency of said fourth signal is substantially equal to said output frequency.

22. The method according to claim 19, wherein said fourth signal is adjusted by plus one-twelve period on the rising edge of said second signal.

23. The method according to claim 19, wherein said fourth signal is adjusted by minus one-twelve period on the falling edge of said second signal.

## 29

24. The method according to claim 19, wherein said first frequency is substantially equal to four-thirds of said output frequency.

25. The method according to claim 19, wherein said second frequency is substantially equal to two-thirds of said output frequency.

26. A radio, comprising:

a transmitter coupled to an antenna, said transmitter comprising a local oscillator having an output frequency, said local oscillator comprising:

an oscillator circuit operative to generate a first signal at a first frequency and a second signal delayed from said first signal;

a divider coupled to said oscillator circuit and operative to divide said first signal to generate a third signal therefrom at a second frequency;

an logic combiner circuit operative to logically combine said second signal and said third signal to generate a fourth signal therefrom;

means for dynamically adjusting the edges of said fourth signal in accordance with the state of said second

## 30

signal and said third signal to generate an output signal having an average frequency substantially equal to said output frequency;

a receiver coupled to said antenna; and  
a baseband processor coupled to said transmitter and said receiver.

27. The radio according to claim 26, wherein said logic combiner circuit is operative to logically XOR said third signal to generate said fourth signal therefrom.

28. The radio according to claim 26, wherein said fourth signal is adjusted by plus one-twelve period on the rising edge of said second signal.

29. The radio according to claim 26, wherein said fourth signal is adjusted by minus one-twelve period on the falling edge of said second signal.

30. The radio according to claim 26, wherein said first frequency is substantially equal to four-thirds of said output frequency.

31. The radio according to claim 26, wherein said second frequency is substantially equal to two-thirds of said output frequency.

\* \* \* \* \*